

## I2 Structural Requirements for Polar Class Ships

(August 2006)

### I2.1 General

(Rev.1 Jan 2007)  
(Corr.1

#### I2.1.1 Application\*

Oct 2007)  
(Rev.2

This UR applies to Polar Class ships according to UR I1.

Nov 2010)  
(Rev.3

#### I2.1.2 Definitions

Apr 2016)  
(Rev.4

I2.1.2.1 The length  $L_{UI}$  is the distance, in m, measured horizontally from the fore side of the stem at the intersection with the upper ice waterline (UIWL) to the after side of the rudder post, or the centre of the rudder stock if there is no rudder post.  $L_{UI}$  is not to be less than 96%, and need not be greater than 97%, of the extreme length of the upper ice waterline (UIWL) measured horizontally from the fore side of the stem. In ships with unusual stern and bow arrangement the length  $L_{UI}$  will be specially considered.

Dec 2019)  
(Rev.5

June 2025)

I2.1.2.2 The ship displacement  $D_{UI}$  is the displacement, in kt, of the ship corresponding to the upper ice waterline (UIWL). Where multiple waterlines are used for determining the UIWL, the displacement is to be determined from the waterline corresponding to the greatest displacement.

### I2.2 Hull areas

I2.2.1 The hull of Polar Class ships is divided into areas reflecting the magnitude of the loads that are expected to act upon them. In the longitudinal direction, there are four regions: Bow, Bow Intermediate, Midbody and Stern. The Bow Intermediate, Midbody and Stern regions are further divided in the vertical direction into the Bottom, Lower and Icebelt regions. The extent of each hull area is illustrated in Figure 1.


---

\* Note:

1. UR I2 applies to ships contracted for construction on or after 1 July 2007.
2. Rev.1 of this UR is to be uniformly applied by IACS Societies on ships contracted for construction on and after 1 March 2008.
3. Rev.2 of this UR is to be uniformly implemented by the IACS Societies on ships contracted for construction on or after 1 January 2012.
4. Rev.3 of this UR is to be uniformly implemented by the IACS Societies on ships contracted for construction on or after 1 July 2017.
5. The “contracted for construction” date means the date on which the contract to build the vessel is signed between the prospective owner and the shipbuilder. For further details regarding the date of “contract for construction”, refer to IACS Procedural Requirement (PR) No. 29.
6. Rev.4 of this UR is to be uniformly implemented by the IACS Societies on ships contracted for construction on or after 1 Jan 2021.
7. Rev.5 of this UR is to be uniformly implemented by the IACS Societies on ships contracted for construction on or after 1 January 2027.

**I2**  
(cont)

**Figure 1 - Hull area extents**

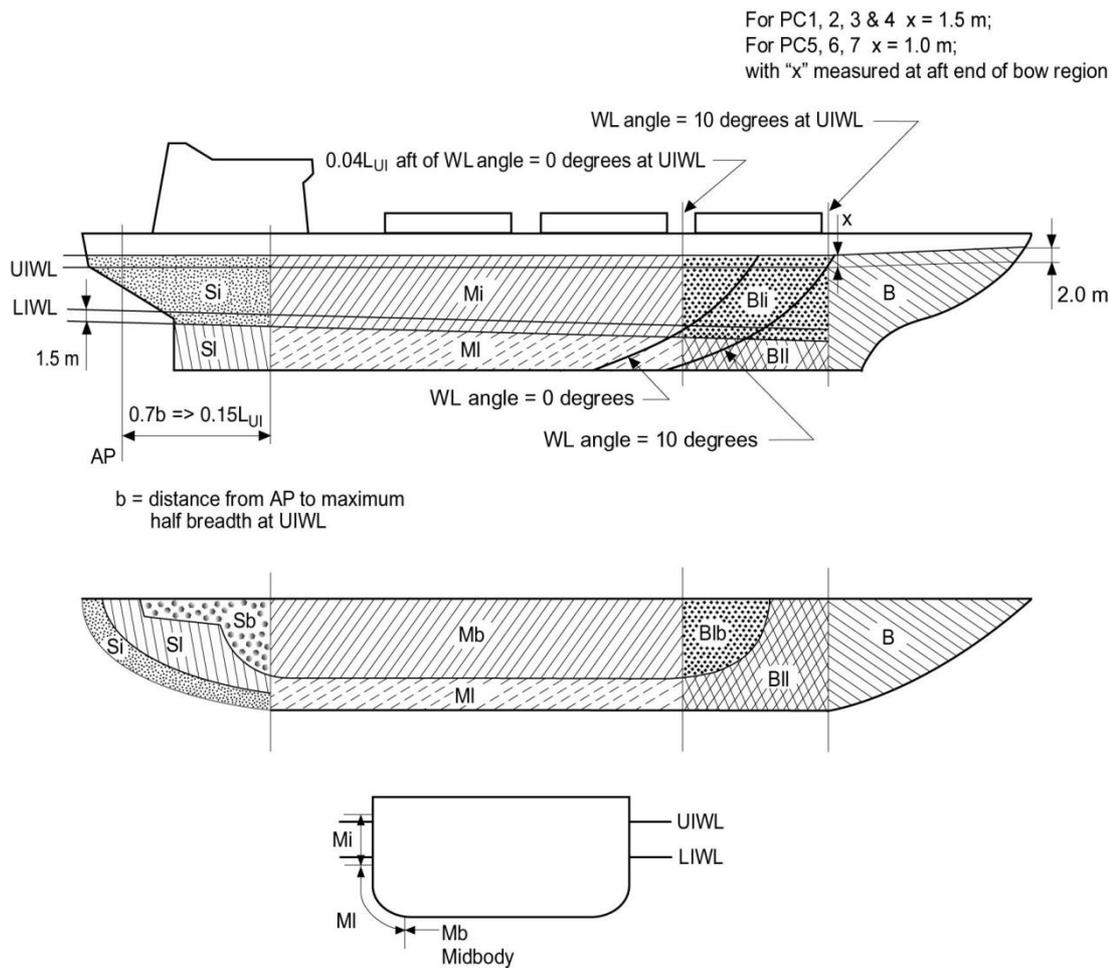

I2.2.2 The upper ice waterline (UIWL) and lower ice waterline (LIWL) are as defined in UR I1.3.

I2.2.3 Figure 1 notwithstanding, at no time is the boundary between the Bow and Bow Intermediate regions to be forward of the intersection point of the line of the stem and the ship baseline.

I2.2.4 Figure 1 notwithstanding, the aft boundary of the Bow region need not be more than 0.45 L<sub>UI</sub> aft of the fore side of the stem at the intersection with the upper ice waterline (UIWL).

I2.2.5 The boundary between the bottom and lower regions is to be taken at the point where the shell is inclined 7° from horizontal.

I2.2.6 If a ship is intended to operate astern in ice regions, the aft section of the ship is to be designed using the Bow and Bow Intermediate hull area requirements.

I2.2.7 Figure 1 notwithstanding, if the ship is assigned the additional notation "Icebreaker", the forward boundary of the stern region is to be at least 0.04 L<sub>UI</sub> forward of the section where the parallel ship side at the upper ice waterline (UIWL) ends.

**I2**

(cont)

**I2.3 Design ice loads****I2.3.1 General**

- (i) A glancing impact on the bow is the design scenario for determining the scantlings required to resist ice loads.
- (ii) The design ice load is characterized by an average pressure ( $P_{avg}$ ) uniformly distributed over a rectangular load patch of height ( $b$ ) and width ( $w$ ).
- (iii) Within the Bow area of all Polar Class ships, and within the Bow Intermediate Icebelt area of Polar Class PC6 and PC7, the ice load parameters are functions of the actual bow shape. To determine the ice load parameters ( $P_{avg}$ ,  $b$  and  $w$ ), it is required to calculate the following ice load characteristics for sub-regions of the bow area; shape coefficient ( $f_{a_i}$ ), total glancing impact force ( $F_i$ ), line load ( $Q_i$ ) and pressure ( $P_i$ ).
- (iv) In other ice-strengthened areas, the ice load parameters ( $P_{avg}$ ,  $b_{NonBow}$  and  $w_{NonBow}$ ) are determined independently of the hull shape and based on a fixed load patch aspect ratio,  $AR = 3.6$ .
- (v) Design ice forces calculated according to I2.3.2.1 (iii) are applicable for bow forms where the buttock angle  $\gamma$  at the stem is positive and less than 80 deg, and the normal frame angle  $\beta'$  at the centre of the foremost sub-region, as defined in I2.3.2.1 (i), is greater than 10 deg.
- (vi) Design ice forces calculated according to I2.3.2.1 (iv) are applicable for ships which are assigned the Polar Class PC6 or PC7 and have a bow form with vertical sides. This includes bows where the normal frame angles  $\beta'$  at the considered sub-regions, as defined in I2.3.2.1 (i), are between 0 and 10 deg.
- (vii) For ships which are assigned the Polar Class PC6 or PC7, and equipped with bulbous bows, the design ice forces on the bow are to be determined according to I2.3.2.1 (iv). In addition, the design forces are not to be taken less than those given in I2.3.2.1 (iii), assuming  $f_a = 0.6$  and  $AR = 1.3$ .
- (viii) For ships with bow forms other than those defined in (v) to (vii), design forces are to be specially considered by the Classification Society.
- (ix) Ship structures that are not directly subjected to ice loads may still experience inertial loads of stowed cargo and equipment resulting from ship/ice interaction. These inertial loads, based on accelerations determined by the Classification Society, are to be considered in the design of these structures.

**I2.3.2 Glancing impact load characteristics**

The parameters defining the glancing impact load characteristics are reflected in the Class Factors listed in Table 1 and Table 2.

# I2

(cont)

**Table 1 - Class factors to be used in I2.3.2.1 (iii)**

Polar Class	Crushing failure Class Factor ( $CF_C$ )	Flexural failure Class Factor ( $CF_F$ )	Load patch dimensions Class Factor ( $CF_D$ )	Displacement Class Factor ( $CF_{DIS}$ )	Longitudinal strength Class Factor ( $CF_L$ )
PC1	17.69	68.60	2.01	250	7.46
PC2	9.89	46.80	1.75	210	5.46
PC3	6.06	21.17	1.53	180	4.17
PC4	4.50	13.48	1.42	130	3.15
PC5	3.10	9.00	1.31	70	2.50
PC6	2.40	5.49	1.17	40	2.37
PC7	1.80	4.06	1.11	22	1.81


**Table 2 - Class factors to be used in I2.3.2.1 (iv)**

Polar Class	Crushing failure Class Factor ( $CF_{CV}$ )	Line load Class Factor ( $CF_{QV}$ )	Pressure Class Factor ( $CF_{PV}$ )
PC6	3.43	2.82	0.65
PC7	2.60	2.33	0.65

## I2.3.2.1 Bow area

(i) In the Bow area, the force (F), line load (Q), pressure (P) and load patch aspect ratio (AR) associated with the glancing impact load scenario are functions of the hull angles measured at the upper ice waterline (UIWL). The influence of the hull angles is captured through calculation of a bow shape coefficient (fa). The hull angles are defined in Figure 2.

**Figure 2 - Definition of hull angles**

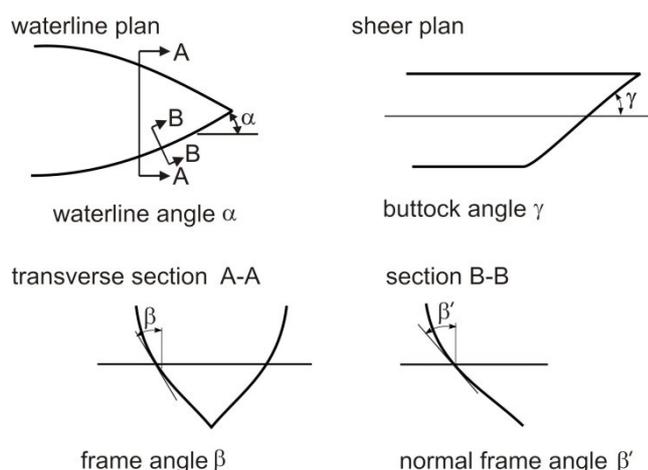

Note:  $\beta'$  = normal frame angle at upper ice waterline [deg]

$\alpha$  = upper ice waterline angle [deg]

$\gamma$  = buttock angle at upper ice waterline (angle of buttock line measured from horizontal) [deg]

$\tan(\beta) = \tan(\alpha)/\tan(\gamma)$

$\tan(\beta') = \tan(\beta) \cdot \cos(\alpha)$

## I2 (cont)

(ii) The waterline length of the bow region is generally to be divided into 4 sub-regions of equal length. The force (F), line load (Q), pressure (P) and load patch aspect ratio (AR) are to be calculated with respect to the mid-length position of each sub-region (each maximum of F, Q and P is to be used in the calculation of the ice load parameters  $P_{avg}$ , b and w).

(iii) The Bow area load characteristics for bow forms defined in I2.3.1 (v) are determined as follows:

(a) Shape coefficient,  $fa_i$ , is to be taken as

$$fa_i = \text{minimum}(fa_{i,1}; fa_{i,2}; fa_{i,3})$$

$$\begin{aligned} \text{where } fa_{i,1} &= (0.097 - 0.68 \cdot (x/L_{UI} - 0.15)^2) \cdot \alpha_i / (\beta'_i)^{0.5} \\ fa_{i,2} &= 1.2 \cdot CF_F / (\sin(\beta'_i) \cdot CF_C \cdot D_{UI}^{0.64}) \\ fa_{i,3} &= 0.60 \end{aligned}$$

(b) Force,  $F_i$ :

$$F_i = fa_i \cdot CF_C \cdot D_{UI}^{0.64} \text{ [MN]}$$

(c) Load patch aspect ratio,  $AR_i$ :

$$AR_i = 7.46 \cdot \sin(\beta'_i) \geq 1.3$$

(d) Line load,  $Q_i$ :

$$Q_i = F_i^{0.61} \cdot CF_D / AR_i^{0.35} \text{ [MN/m]}$$

(e) Pressure,  $P_i$ :

$$P_i = F_i^{0.22} \cdot CF_D^2 \cdot AR_i^{0.3} \text{ [MPa]}$$

where  $i$  = sub-region considered

$L_{UI}$  = length as defined in I2.1.2.1 [m]

$x$  = distance from the fore side of the stem at the intersection with the upper ice waterline (UIWL) to station under consideration [m]

$\alpha$  = waterline angle [deg], see Figure 2

$\beta'$  = normal frame angle [deg], see Figure 2

$D_{UI}$  = displacement as defined in I2.1.2.2, not to be taken less than 5 [kt]

$CF_C$  = Crushing failure Class Factor from Table 1

$CF_F$  = Flexural failure Class Factor from Table 1

$CF_D$  = Load patch dimensions Class Factor from Table 1

(iv) The Bow area load characteristics for bow forms defined in I2.3.1 (vi) are determined as follows:

(a) Shape coefficient,  $fa_i$ , is to be taken as

$$fa_i = \alpha_i / 30$$

(b) Force,  $F_i$ :

$$F_i = fa_i \cdot CF_{CV} \cdot D_{UI}^{0.47} \text{ [MN]}$$

## I2 (cont)

(c) Line load,  $Q_i$ :

$$Q_i = F_i^{0.22} \cdot CF_{QV} \text{ [MN/m]}$$

(d) Pressure,  $P_i$ :

$$P_i = F^{0.56} \cdot CF_{PV} \text{ [MPa]}$$

where  $i$  = sub-region considered

$\alpha$  = waterline angle [deg], see Figure 2

$D_{UI}$  = displacement as defined in I2.1.2.2, not to be taken less than 5 [kt]

$CF_{CV}$  = Crushing failure Class Factor from Table 2

$CF_{QV}$  = Line load Class Factor from Table 2

$CF_{PV}$  = Pressure Class Factor from Table 2

### I2.3.2.2 Hull areas other than the bow

(i) In the hull areas other than the bow, the force ( $F_{\text{NonBow}}$ ) and line load ( $Q_{\text{NonBow}}$ ) used in the determination of the load patch dimensions ( $b_{\text{NonBow}}$ ,  $w_{\text{NonBow}}$ ) and design pressure ( $P_{\text{avg}}$ ) are determined as follows:

(a) Force,  $F_{\text{NonBow}}$ :

$$F_{\text{NonBow}} = 0.36 \cdot CF_C \cdot DF \text{ [MN]}$$

(b) Line Load,  $Q_{\text{NonBow}}$ :

$$Q_{\text{NonBow}} = 0.639 \cdot F_{\text{NonBow}}^{0.61} \cdot CF_D \text{ [MN/m]}$$

where  $CF_C$  = Crushing failure Class Factor from Table 1

$DF$  = ship displacement factor

$$= D_{UI}^{0.64} \quad \text{if } D_{UI} \leq CF_{DIS}$$

$$= CF_{DIS}^{0.64} + 0.10 \cdot (D_{UI} - CF_{DIS}) \quad \text{if } D_{UI} > CF_{DIS}$$

$D_{UI}$  = displacement as defined in I2.1.2.2, not to be taken less than 10 [kt]

$CF_{DIS}$  = Displacement Class Factor from Table 1

$CF_D$  = Load patch dimensions Class Factor from Table 1

### I2.3.3 Design load patch

(i) In the Bow area, and the Bow Intermediate Icebelt area for ships with class notation PC6 and PC7, the design load patch has dimensions of width,  $w_{\text{Bow}}$ , and height,  $b_{\text{Bow}}$ , defined as follows:

$$w_{\text{Bow}} = F_{\text{Bow}} / Q_{\text{Bow}} \text{ [m]}$$

$$b_{\text{Bow}} = Q_{\text{Bow}} / P_{\text{Bow}} \text{ [m]}$$

where  $F_{\text{Bow}}$  = maximum force  $F_i$  in the Bow area [MN]

$Q_{\text{Bow}}$  = maximum line load  $Q_i$  in the Bow area [MN/m]

$P_{\text{Bow}}$  = maximum pressure  $P_i$  in the Bow area [MPa]

## I2 (cont)

(ii) In hull areas other than those covered by I2.3.3 (i), the design load patch has dimensions of width,  $W_{\text{NonBow}}$ , and height,  $b_{\text{NonBow}}$ , defined as follows:

$$W_{\text{NonBow}} = F_{\text{NonBow}} / Q_{\text{NonBow}} \text{ [m]}$$

$$b_{\text{NonBow}} = W_{\text{NonBow}} / 3.6 \text{ [m]}$$

where  $F_{\text{NonBow}}$  = force as defined in I2.3.2.2 (i) (a) [MN]  
 $Q_{\text{NonBow}}$  = line load as defined in I2.3.2.2 (i) (b) [MN/m]

### I2.3.4 Pressure within the design load patch

(i) The average pressure,  $P_{\text{avg}}$ , within a design load patch is determined as follows:

$$P_{\text{avg}} = F / (b \cdot w) \text{ [MPa]}$$

where  $F = F_{\text{Bow}}$  or  $F_{\text{NonBow}}$  as appropriate for the hull area under consideration [MN]  
 $b = b_{\text{Bow}}$  or  $b_{\text{NonBow}}$  as appropriate for the hull area under consideration [m]  
 $w = W_{\text{Bow}}$  or  $W_{\text{NonBow}}$  as appropriate for the hull area under consideration [m]

(ii) Areas of higher, concentrated pressure exist within the load patch. In general, smaller areas have higher local pressures. Accordingly, the peak pressure factors listed in Table 3 are used to account for the pressure concentration on localized structural members.

**Table 3 - Peak Pressure Factors**

Structural member		Peak Pressure Factor (PPF <sub>i</sub> )
Plating	Transversely-framed	$PPF_p = (1.8 - s) \geq 1.2$
	Longitudinally-framed	$PPF_p = (2.2 - 1.2 \cdot s) \geq 1.5$
Frames in transverse framing systems	With load distributing stringers	$PPF_t = (1.6 - s) \geq 1.0$
	With no load distributing stringers	$PPF_t = (1.8 - s) \geq 1.2$
Frames in bottom structures		$PPF_s = 1.0$
Load carrying stringers		$PPF_s = 1.0$ , if $S_w \geq 0.5 \cdot w$
Side longitudinals		$PPF_s = 2.0 - 2.0 \cdot S_w / w$ ,
Web frames		if $S_w < (0.5 \cdot w)$
where: $s$ = frame or longitudinal spacing [m] $S_w$ = web frame spacing [m] $w$ = ice load patch width [m]		

### I2.3.5 Hull area factors

(i) Associated with each hull area is an Area Factor that reflects the relative magnitude of the load expected in that area. The Area Factor (AF) for each hull area is listed in Table 4.

(ii) In the event that a structural member spans across the boundary of a hull area, the largest hull area factor is to be used in the scantling determination of the member.

(iii) Due to their increased manoeuvrability, ships having propulsion arrangements with azimuth thruster(s) or "podded" propellers are to have specially considered Stern Icebelt ( $S_i$ ) and Stern Lower ( $S_l$ ) hull area factors.

## I2 (cont)

(iv) For ships assigned the additional notation “Icebreaker”, the Area Factor (AF) for each hull area is listed in Table 5.

**Table 4 - Hull Area Factors (AF)**

Hull area		Area	Polar Class						
			PC1	PC2	PC3	PC4	PC5	PC6	PC7
Bow (B)	All	B	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Bow Intermediate (BI)	Icebelt	Bl <sub>i</sub>	0.90	0.85	0.85	0.80	0.80	1.00*	1.00*
	Lower	Bl <sub>l</sub>	0.70	0.65	0.65	0.60	0.55	0.55	0.50
	Bottom	Bl <sub>b</sub>	0.55	0.50	0.45	0.40	0.35	0.30	0.25
Midbody (M)	Icebelt	M <sub>i</sub>	0.70	0.65	0.55	0.55	0.50	0.45	0.45
	Lower	M <sub>l</sub>	0.50	0.45	0.40	0.35	0.30	0.25	0.25
	Bottom	M <sub>b</sub>	0.30	0.30	0.25	**	**	**	**
Stern (S)	Icebelt	S <sub>i</sub>	0.75	0.70	0.65	0.60	0.50	0.40	0.35
	Lower	S <sub>l</sub>	0.45	0.40	0.35	0.30	0.25	0.25	0.25
	Bottom	S <sub>b</sub>	0.35	0.30	0.30	0.25	0.15	**	**

Note to Table 4: \* See I2.3.1 (iii);

\*\* Indicates that strengthening for ice loads is not necessary.

**Table 5 - Hull Area Factors (AF) for ships with additional notation “Icebreaker”**

Hull area		Area	Polar Class						
			PC1	PC2	PC3	PC4	PC5	PC6	PC7
Bow (B)	All	B	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Bow Intermediate (BI)	Icebelt	Bl <sub>i</sub>	0.90	0.85	0.85	0.85	0.85	1.00	1.00
	Lower	Bl <sub>l</sub>	0.70	0.65	0.65	0.65	0.65	0.65	0.65
	Bottom	Bl <sub>b</sub>	0.55	0.50	0.45	0.45	0.45	0.45	0.45
Midbody (M)	Icebelt	M <sub>i</sub>	0.70	0.65	0.55	0.55	0.55	0.55	0.55
	Lower	M <sub>l</sub>	0.50	0.45	0.40	0.40	0.40	0.40	0.40
	Bottom	M <sub>b</sub>	0.30	0.30	0.25	0.25	0.25	0.25	0.25
Stern (S)	Icebelt	S <sub>i</sub>	0.95	0.90	0.80	0.80	0.80	0.80	0.80
	Lower	S <sub>l</sub>	0.55	0.50	0.45	0.45	0.45	0.45	0.45
	Bottom	S <sub>b</sub>	0.35	0.30	0.30	0.30	0.30	0.30	0.30

### 12.4 Shell plate requirements

12.4.1 The required minimum shell plate thickness,  $t$ , is given by:

$$t = t_{\text{net}} + t_s \text{ [mm]}$$

where  $t_{\text{net}}$  = plate thickness required to resist ice loads according to I2.4.2 [mm]

$t_s$  = corrosion and abrasion allowance according to I2.11 [mm]

12.4.2 The thickness of shell plating required to resist the design ice load,  $t_{\text{net}}$ , depends on the orientation of the framing.

In the case of transversely-framed plating ( $\Omega \geq 70$  deg), including all bottom plating, i.e. plating in hull areas Bl<sub>b</sub>, M<sub>b</sub> and S<sub>b</sub>, the net thickness is given by:

$$t_{\text{net}} = 500 \cdot s \cdot ((AF \cdot PPF_p \cdot P_{\text{avg}}) / \sigma_y)^{0.5} / (1 + s / (2 \cdot b)) \text{ [mm]}$$

## 12 (cont)

In the case of longitudinally-framed plating ( $\Omega \leq 20$  deg), when  $b \geq s$ , the net thickness is given by:

$$t_{\text{net}} = 500 \cdot s \cdot ((AF \cdot PPF_p \cdot P_{\text{avg}}) / \sigma_y)^{0.5} / (1 + s / (2 \cdot l)) \text{ [mm]}$$

In the case of longitudinally-framed plating ( $\Omega \leq 20$  deg), when  $b < s$ , the net thickness is given by:

$$t_{\text{net}} = 500 \cdot s \cdot ((AF \cdot PPF_p \cdot P_{\text{avg}}) / \sigma_y)^{0.5} \cdot (2 \cdot b / s - (b / s)^2)^{0.5} / (1 + s / (2 \cdot l)) \text{ [mm]}$$

In the case of obliquely-framed plating ( $70$  deg  $> \Omega > 20$  deg), linear interpolation is to be used.

where  $\Omega$  = smallest angle between the chord of the waterline and the line of the first level framing as illustrated in Figure 3 [deg].

$s$  = transverse frame spacing in transversely-framed ships or longitudinal frame spacing in longitudinally-framed ships [m]

$AF$  = Hull Area Factor from Table 4 or Table 5

$PPF_p$  = Peak Pressure Factor from Table 3


$P_{\text{avg}}$  = average patch pressure as defined in 12.3.4 [MPa]

$\sigma_y$  = minimum upper yield stress of the material [N/mm<sup>2</sup>]

$b$  = height of design load patch [m], where  $b$  is to be taken not greater than  $(l - s/4)$  in the case of determination of the net thickness for transversely framed plating

$l$  = distance between frame supports, i.e. equal to the frame span as given in 12.5.5, but not reduced for any fitted end brackets [m]. When a load-distributing stringer is fitted, the length  $l$  need not be taken larger than the distance from the stringer to the most distant frame support.

**Figure 3 - Shell framing angle  $\Omega$**

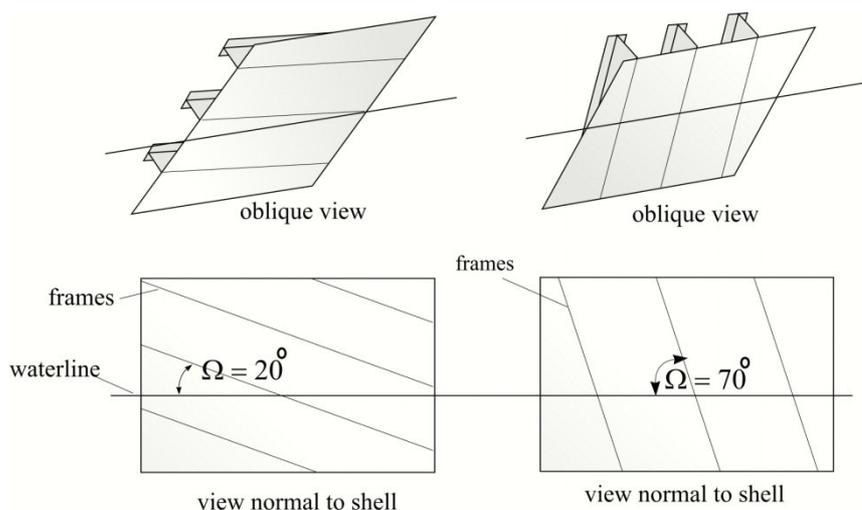

## 12

(cont)

**12.5 Framing - General**

12.5.1 Framing members of Polar Class ships are to be designed to withstand the ice loads defined in I2.3.

12.5.2 The term “framing member” refers to transverse and longitudinal local frames, load-carrying stringers and web frames in the areas of the hull exposed to ice pressure, see Figure 1. Where load-distributing stringers have been fitted, the arrangement and scantlings of these are to be in accordance with the requirements of the Classification Society.

12.5.3 The strength of a framing member is dependent upon the fixity that is provided at its supports. Fixity can be assumed where framing members are either continuous through the support or attached to a supporting section with a connection bracket. In other cases, simple support is to be assumed unless the connection can be demonstrated to provide significant rotational restraint. Fixity is to be ensured at the support of any framing which terminates within an ice-strengthened area.

12.5.4 The details of framing member intersection with other framing members, including plated structures, as well as the details for securing the ends of framing members at supporting sections, are to be in accordance with the requirements of the Classification Society.

12.5.5 The effective span of a framing member is to be determined on the basis of its moulded length. If brackets are fitted, the effective span may be reduced in accordance with the usual practice of the Classification Society. Brackets are to be configured to ensure stability in the elastic and post-yield response regions.

12.5.6 When calculating the section modulus and shear area of a framing member, net thicknesses of the web, flange (if fitted) and attached shell plating are to be used. The shear area of a framing member may include that material contained over the full depth of the member, i.e. web area including portion of flange, if fitted, and attached shell plating.

12.5.7 The actual net effective shear area,  $A_w$ , of a transverse or longitudinal local frame is given by:

$$A_w = (h - 0.5t_c + t_{pn} + 0.5t_s) \cdot t_{wn} \cdot \sin \varphi_w / 100 \text{ [cm}^2\text{]}$$

where

$h$  = height of stiffener [mm], see Figure 4

$t_{pn}$  = fitted net shell plate thickness [mm] (complying with  $t_{net}$  as required by I2.4.2)

$t_s$  = corrosion and abrasion deduction [mm] to be subtracted from the shell plate thickness, see I2.11.2

$t_{wn}$  = net web thickness [mm]

$$= t_w - t_c$$

$t_w$  = as built web thickness [mm], see Figure 4

$t_c$  = corrosion deduction [mm] to be subtracted from the web and flange thickness (as specified by the Classification Society, but not less than  $t_s$  as required by I2.11.3).

$\varphi_w$  = smallest angle between shell plate and stiffener web, measured at the midspan of the stiffener, see Figure 4. The angle  $\varphi_w$  may be taken as 90 deg provided the smallest angle is not less than 75 deg.



# 12

(cont)

## 12.6 Framing - Local frames in bottom structures and transverse local frames in side structures

12.6.1 The local frames in bottom structures (i.e. hull areas  $B_{lb}$ ,  $M_b$  and  $S_b$ ) and transverse local frames in side structures are to be dimensioned such that the combined effects of shear and bending do not exceed the plastic strength of the member. The plastic strength is defined by the magnitude of midspan load that causes the development of a plastic collapse mechanism.

For bottom structure the patch load shall be applied with the dimension (b) parallel with the frame direction.

12.6.2 The actual net effective shear area of the frame,  $A_w$ , as defined in I2.5.7, is to comply with the following condition:  $A_w \geq A_t$ , where:

$$A_t = 100^2 \cdot 0.5 \cdot LL \cdot s \cdot (AF \cdot PPF \cdot P_{avg}) / (0.577 \cdot \sigma_y) \text{ [cm}^2\text{]}$$

where LL = length of loaded portion of span  
= lesser of a and b [m]

a = local frame span as defined in I2.5.5 [m]

b = height of design ice load patch as defined in I2.3.3 (i) or I2.3.3 (ii) [m]

s = spacing of local frame [m]

AF = Hull Area Factor from Table 4 or Table 5

PPF = Peak Pressure Factor,  $PPF_t$  or  $PPF_s$  as appropriate from Table 3

$P_{avg}$  = average pressure within load patch as defined in I2.3.4 [MPa]

$\sigma_y$  = minimum upper yield stress of the material [N/mm<sup>2</sup>]

12.6.3 The actual net effective plastic section modulus of the plate/stiffener combination,  $Z_p$ , as defined in I2.5.8, is to comply with the following condition:  $Z_p \geq Z_{pt}$ , where  $Z_{pt}$  is to be the greater calculated on the basis of two load conditions: a) ice load acting at the midspan of the local frame, and b) the ice load acting near a support. The  $A_1$  parameter defined below reflects these two conditions:

$$Z_{pt} = 100^3 \cdot LL \cdot Y \cdot s \cdot (AF \cdot PPF \cdot P_{avg}) \cdot a \cdot A_1 / (4 \cdot \sigma_y) \text{ [cm}^3\text{]}$$

where AF, PPF,  $P_{avg}$ , LL, b, s, a and  $\sigma_y$  are as given in I2.6.2

$$Y = 1 - 0.5 \cdot (LL / a)$$

$A_1$  = maximum of

$$A_{1A} = 1 / (1 + j / 2 + k_w \cdot j / 2 \cdot [(1 - a_1^2)^{0.5} - 1])$$

$$A_{1B} = (1 - 1 / (2 \cdot a_1 \cdot Y)) / (0.275 + 1.44 \cdot k_z^{0.7})$$

j = 1 for a local frame with one simple support outside the ice-strengthened areas

= 2 for a local frame without any simple supports

$$a_1 = A_t / A_w$$

$A_t$  = minimum shear area of the local frame as given in I2.6.2 [cm<sup>2</sup>]

$A_w$  = effective net shear area of the local frame (calculated according to I2.5.7) [cm<sup>2</sup>]

$k_w = 1 / (1 + 2 \cdot A_{fn} / A_w)$  with  $A_{fn}$  as given in I2.5.8

$k_z = z_p / Z_p$  in general

= 0.0 when the frame is arranged with end bracket

$z_p$  = sum of individual plastic section moduli of flange and shell plate as fitted [cm<sup>3</sup>]

$$= (b_{fn} \cdot t_{fn}^2 / 4 + b_{eff} \cdot t_{pn}^2 / 4) / 1000$$

$b_{fn}$  = net flange breadth [mm]

$$= b_f - t_c \text{ (} t_c \text{ as given in I2.5.7)}$$

$b_f$  = flange breadth [mm], see Figure 4

$t_{fn}$  = net flange thickness [mm]

$$= t_f - t_c \text{ (} t_c \text{ as given in I2.5.7)}$$

## I2 (cont)

$t_f$  = as-built flange thickness [mm], see Figure 4

$t_{pn}$  = the fitted net shell plate thickness [mm] (not to be less than  $t_{net}$  as given in I2.4)

$b_{eff}$  = effective width of shell plate flange [mm]  
=  $500 \cdot s$

$Z_p$  = net effective plastic section modulus of the local frame (calculated according to I2.5.8) [cm<sup>3</sup>]

I2.6.4 The scantlings of the local frame are to meet the structural stability requirements of I2.9.

### I2.7 Framing - Longitudinal local frames in side structures

I2.7.1 Longitudinal local frames in side structures are to be dimensioned such that the combined effects of shear and bending do not exceed the plastic strength of the member. The plastic strength is defined by the magnitude of midspan load that causes the development of a plastic collapse mechanism.

I2.7.2 The actual net effective shear area of the frame,  $A_w$ , as defined in I2.5.7, is to comply with the following condition:  $A_w \geq A_L$ , where:

$$A_L = 100^2 \cdot (AF \cdot PPF_s \cdot P_{avg}) \cdot 0.5 \cdot b_1 \cdot a / (0.577 \cdot \sigma_y) \text{ [cm}^2\text{]}$$

where AF = Hull Area Factor from Table 4 or Table 5

PPF<sub>s</sub> = Peak Pressure Factor from Table 3

P<sub>avg</sub> = average pressure within load patch as defined in I2.3.4 [MPa]

$b_1 = k_o \cdot b_2$  [m]

$k_o = 1 - 0.3 / b'$

$b' = b / s$

$b$  = height of design ice load patch as defined in I2.3.3 (i) or I2.3.3 (ii) [m]

$s$  = spacing of longitudinal frames [m]

$b_2 = b \cdot (1 - 0.25 \cdot b')$  [m], if  $b' < 2$

=  $s$  [m], if  $b' \geq 2$

$a$  = effective span of longitudinal local frame as given in I2.5.5 [m]

$\sigma_y$  = minimum upper yield stress of the material [N/mm<sup>2</sup>]

I2.7.3 The actual net effective plastic section modulus of the plate/stiffener combination,  $Z_p$ , as defined in I2.5.8, is to comply with the following condition:  $Z_p \geq Z_{pL}$ , where:

$$Z_{pL} = 100^3 \cdot (AF \cdot PPF_s \cdot P_{avg}) \cdot b_1 \cdot a^2 \cdot A_4 / (8 \cdot \sigma_y) \text{ [cm}^3\text{]}$$

where AF, PPF<sub>s</sub>, P<sub>avg</sub>,  $b_1$ ,  $a$  and  $\sigma_y$  are as given in I2.7.2

$A_4 = 1 / (2 + k_{wl} \cdot [(1 - a_4^2)^{0.5} - 1])$

$a_4 = A_L / A_w$

$A_L$  = minimum shear area for longitudinal as given in I2.7.2 [cm<sup>2</sup>]

$A_w$  = net effective shear area of longitudinal (calculated according to I2.5.7) [cm<sup>2</sup>]

$k_{wl} = 1 / (1 + 2 \cdot A_{fn} / A_w)$  with  $A_{fn}$  as given in I2.5.8

I2.7.4 The scantlings of the longitudinals are to meet the structural stability requirements of I2.9.

### I2.8 Framing - Web frames and load carrying stringers

I2.8.1 Web frames and load-carrying stringers are to be designed to withstand the ice load patch as defined in I2.3. The load patch is to be applied at locations where the capacity of these members under the combined effects of bending and shear is minimised.

## I2 (cont)

12.8.2 Web frames and load-carrying stringers are to be dimensioned such that the combined effects of shear and bending do not exceed the limit state(s) defined by the Classification Society. Where the structural configuration is such that members do not form part of a grillage system, the appropriate peak pressure factor (PPF) from Table 3 is to be used. Special attention is to be paid to the shear capacity in way of lightening holes and cut-outs in way of intersecting members.

12.8.3 For determination of scantlings of load carrying stringers, web frames supporting local frames, or web frames supporting load carrying stringers forming part of a structural grillage system, appropriate methods as outlined in I2.17 are normally to be used.

12.8.4 The scantlings of web frames and load-carrying stringers are to meet the structural stability requirements of I2.9.

### 12.9 Framing - Structural stability

12.9.1 To prevent local buckling in the web, the ratio of web height ( $h_w$ ) to net web thickness ( $t_{wn}$ ) of any framing member is not to exceed:

For flat bar sections:  $h_w / t_{wn} \leq 282 / (\sigma_y)^{0.5}$

For bulb, tee and angle sections:  $h_w / t_{wn} \leq 805 / (\sigma_y)^{0.5}$

where  $h_w$  = web height

$t_{wn}$  = net web thickness

$\sigma_y$  = minimum upper yield stress of the material [N/mm<sup>2</sup>]

12.9.2 Framing members for which it is not practicable to meet the requirements of 12.9.1 (e.g. load carrying stringers or deep web frames) are required to have their webs effectively stiffened. The scantlings of the web stiffeners are to ensure the structural stability of the framing member. The minimum net web thickness for these framing members is given by:

$$t_{wn} = 2.63 \cdot 10^{-3} \cdot c_1 \cdot (\sigma_y / (5.34 + 4 \cdot (c_1 / c_2)^2))^{0.5} \text{ [mm]}$$

where  $c_1 = h_w - 0.8 \cdot h$  [mm]


$h_w$  = web height of stringer / web frame [mm] (see Figure 5)

$h$  = height of framing member penetrating the member under consideration (0 if no such framing member) [mm] (see Figure 5)

$c_2$  = spacing between supporting structure oriented perpendicular to the member under consideration [mm] (see Figure 5)

$\sigma_y$  = minimum upper yield stress of the material [N/mm<sup>2</sup>]

**Figure 5 - Parameter definition of web stiffening**

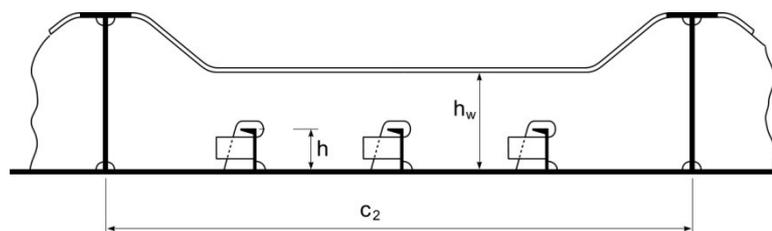

## I2 (cont)

I2.9.3 In addition, the following is to be satisfied:

$$t_{wn} \geq 0.35 \cdot t_{pn} \cdot (\sigma_y / 235)^{0.5}$$

where  $\sigma_y$  = minimum upper yield stress of the shell plate in way of the framing member [N/mm<sup>2</sup>]

$t_{wn}$  = net thickness of the web [mm]

$t_{pn}$  = net thickness of the shell plate in way of the framing member [mm]

I2.9.4 To prevent local flange buckling of welded profiles, the following are to be satisfied:

(i) The flange width,  $b_f$  [mm], is not to be less than five times the net thickness of the web,  $t_{wn}$ .

(ii) The flange outstand,  $b_{out}$  [mm], is to meet the following requirement:

$$b_{out} / t_{fn} \leq 155 / (\sigma_y)^{0.5}$$

where  $t_{fn}$  = net thickness of flange [mm]

$\sigma_y$  = minimum upper yield stress of the material [N/mm<sup>2</sup>]

### I2.10 Plated structures

I2.10.1 Plated structures are those stiffened plate elements in contact with the hull and subject to ice loads. These requirements are applicable to an inboard extent which is the lesser of:

- (i) web height of adjacent parallel web frame or stringer; or
- (ii) 2.5 times the depth of framing that intersects the plated structure

I2.10.2 The thickness of the plating and the scantlings of attached stiffeners are to be such that the degree of end fixity necessary for the shell framing is ensured.

I2.10.3 The stability of the plated structure is to adequately withstand the ice loads defined in I2.3.

### I2.11 Corrosion/abrasion additions and steel renewal

I2.11.1 Effective protection against corrosion and ice-induced abrasion is recommended for all external surfaces of the shell plating for Polar Class ships.

I2.11.2 The values of corrosion/abrasion additions,  $t_s$ , to be used in determining the shell plate thickness are listed in Table 6.

I2.11.3 Polar Class ships are to have a minimum corrosion/abrasion addition of  $t_s = 1.0$  mm applied to all internal structures within the ice-strengthened hull areas, including plated members adjacent to the shell, as well as stiffener webs and flanges.

## I2 (cont)

**Table 6 - Corrosion/abrasion additions for shell plating**

Hull area	$t_s$ [mm]					
	With effective protection			Without effective protection		
	PC1 - PC3	PC4 & PC5	PC6 & PC7	PC1 - PC3	PC4 & PC5	PC6 & PC7
Bow; Bow Intermediate Icebelt	3.5	2.5	2.0	7.0	5.0	4.0
Bow Intermediate Lower; Midbody & Stern Icebelt	2.5	2.0	2.0	5.0	4.0	3.0
Midbody & Stern Lower; Bottom	2.0	2.0	2.0	4.0	3.0	2.5

I2.11.4 Steel renewal for ice strengthened structures is required when the gauged thickness is less than  $t_{net} + 0.5$  mm.

### I2.12 Materials

I2.12.1 Steel grades of plating for hull structures are to be not less than those given in Table 8 based on the as-built thickness, the Polar Class and the material class of structural members according to I2.12.2.

**Table 7 - Material classes for structural members**


Structural members	Material class
Shell plating within the bow and bow intermediate icebelt hull areas (B, B <sub>ii</sub> )	II
All weather and sea exposed SECONDARY and PRIMARY, as defined in Table 1 of UR S6.1, structural members outside 0.4 L <sub>UI</sub> amidships	I
Plating materials for stem and stern frames, rudder horn, rudder, propeller nozzle, shaft brackets, ice skeg, ice knife and other appendages subject to ice impact loads	II
All inboard framing members attached to the weather and sea-exposed plating, including any contiguous inboard member within 600 mm of the plating	I
Weather-exposed plating and attached framing in cargo holds of ships which by nature of their trade have their cargo hold hatches open during cold weather operations	I
All weather and sea exposed SPECIAL, as defined in Table 1 of UR S6.1, structural members within 0.2 L <sub>UI</sub> from FP	II

I2.12.2 Material classes specified in Table 1 of UR S6.1 are applicable to Polar Class ships regardless of the ship's length. In addition, material classes for weather and sea exposed structural members and for members attached to the weather and sea exposed plating are given in Table 7. Where the material classes in Table 7 and those in Table 1 of UR S6.1 differ, the higher material class is to be applied.

I2.12.3 Steel grades for all plating and attached framing of hull structures and appendages situated below the level of 0.3 m below the lower waterline, as shown in Figure 6, are to be obtained from Table 6 and Table 7 of UR S6 based on the material class for structural members in Table 7 above, regardless of Polar Class.

## I2 (cont)

**Figure 6 - Steel grade requirements for submerged and weather exposed shell plating**

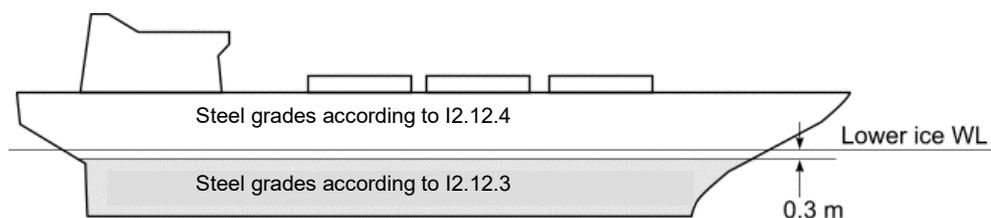

I2.12.4 Steel grades for all weather exposed plating of hull structures and appendages situated above the level of 0.3 m below the lower ice waterline, as shown in Figure 6, are to be not less than given in Table 8.

**Table 8 - Steel grades for weather exposed plating<sup>1)</sup>**

Thickness, t [mm]	Material class I				Material class II				Material class III					
	PC1-5		PC6&7		PC1-5		PC6&7		PC1-3		PC4&5		PC6&7	
	MS	HT	MS	HT	MS	HT	MS	HT	MS	HT	MS	HT	MS	HT
$t \leq 10$	B	AH	B	AH	B	AH	B	AH	E	EH	E	EH	B	AH
$10 < t \leq 15$	B	AH	B	AH	D	DH	B	AH	E	EH	E	EH	D	DH
$15 < t \leq 20$	D	DH	B	AH	D	DH	B	AH	E	EH	E	EH	D	DH
$20 < t \leq 25$	D	DH	B	AH	D	DH	B	AH	E	EH	E	EH	D	DH
$25 < t \leq 30$	D	DH	B	AH	E	EH <sup>2)</sup>	D	DH	E	EH	E	EH	E	EH
$30 < t \leq 35$	D	DH	B	AH	E	EH	D	DH	E	EH	E	EH	E	EH
$35 < t \leq 40$	D	DH	D	DH	E	EH	D	DH	∅	FH	E	EH	E	EH
$40 < t \leq 45$	E	EH	D	DH	E	EH	D	DH	∅	FH	E	EH	E	EH
$45 < t \leq 50$	E	EH	D	DH	E	EH	D	DH	∅	FH	∅	FH	E	EH

∅ Not applicable

Notes to Table 8:

1) Includes weather-exposed plating of hull structures and appendages, as well as their outboard framing members, situated above a level of 0.3 m below the lowest ice waterline.

2) Grades D, DH are allowed for a single strake of side shell plating not more than 1.8 m wide from 0.3 m below the lowest ice waterline.

I2.12.5 Castings are to have specified properties consistent with the expected service temperature for the cast component.

### I2.13 Longitudinal strength

#### I2.13.1 Application

I2.13.1.1 A ramming impact on the bow is the design scenario for the evaluation of the longitudinal strength of the hull.

## I2 (cont)

I2.13.1.2 Intentional ramming is not considered as a design scenario for ships which are designed with vertical or bulbous bows, see I1.1.6. Hence the longitudinal strength requirements given in I2.13 is not to be considered for ships with stem angle  $\gamma_{\text{stem}}$  equal to or larger than 80 deg.

I2.13.1.3 Ice loads are only to be combined with still water loads. The combined stresses are to be compared against permissible bending and shear stresses at different locations along the ship's length. In addition, sufficient local buckling strength is also to be verified.

I2.13.2 Design vertical ice force at the bow

I2.13.2.1 The design vertical ice force at the bow,  $F_{\text{IB}}$ , is to be taken as

$F_{\text{IB}} = \text{minimum} (F_{\text{IB},1}; F_{\text{IB},2}) \text{ [MN]}$

where  $F_{\text{IB},1} = 0.534 \cdot K_{\text{I}}^{0.15} \cdot \sin^{0.2}(\gamma_{\text{stem}}) \cdot (D_{\text{UI}} \cdot K_{\text{h}})^{0.5} \cdot \text{CF}_{\text{L}} \text{ [MN]}$

$F_{\text{IB},2} = 1.20 \cdot \text{CF}_{\text{F}} \text{ [MN]}$

$K_{\text{I}}$  = indentation parameter =  $K_{\text{f}} / K_{\text{h}}$

a) for the case of a blunt bow form

$K_{\text{f}} = (2 \cdot C \cdot B_{\text{UI}}^{1-e_{\text{b}}} / (1 + e_{\text{b}}))^{0.9} \cdot \tan(\gamma_{\text{stem}})^{-0.9 \cdot (1 + e_{\text{b}})}$

b) for the case of wedge bow form ( $\alpha_{\text{stem}} < 80 \text{ deg}$ ),  $e_{\text{b}} = 1$  and the above simplifies to

$K_{\text{f}} = (\tan(\alpha_{\text{stem}}) / \tan^2(\gamma_{\text{stem}}))^{0.9}$

$K_{\text{h}} = 0.01 \cdot A_{\text{wp}} \text{ [MN/m]}$

$\text{CF}_{\text{L}}$  = Longitudinal Strength Class Factor from Table 1

$e_{\text{b}}$  = bow shape exponent which best describes the waterplane (see Figures 7 and 8)

= 1.0 for a simple wedge bow form

= 0.4 to 0.6 for a spoon bow form

= 0 for a landing craft bow form

An approximate  $e_{\text{b}}$  determined by a simple fit is acceptable

$\gamma_{\text{stem}}$  = stem angle to be measured between the horizontal axis and the stem tangent at the upper ice waterline [deg] (buttock angle as per Figure 2 measured on the centreline)

$\alpha_{\text{stem}}$  = waterline angle measured in way of the stem at the upper ice waterline (UIWL) [deg] (see Figure 7)

$C = 1 / (2 \cdot (L_{\text{B}} / B_{\text{UI}})^{e_{\text{b}}})$

$B_{\text{UI}}$  = moulded breadth corresponding to the upper ice waterline (UIWL) [m]

$L_{\text{B}}$  = bow length used in the equation  $y = B_{\text{UI}} / 2 \cdot (x/L_{\text{B}})^{e_{\text{b}}}$  [m] (see Figures 7 and 8)


$D_{\text{UI}}$  = displacement as defined in I2.1.2.2, not to be taken less than 10 [kt]

$A_{\text{wp}}$  = waterplane area corresponding to the upper ice waterline (UIWL) [m<sup>2</sup>]


$\text{CF}_{\text{F}}$  = Flexural Failure Class Factor from Table 1

**I2**  
(cont)

**Figure 7 - Bow shape definition**

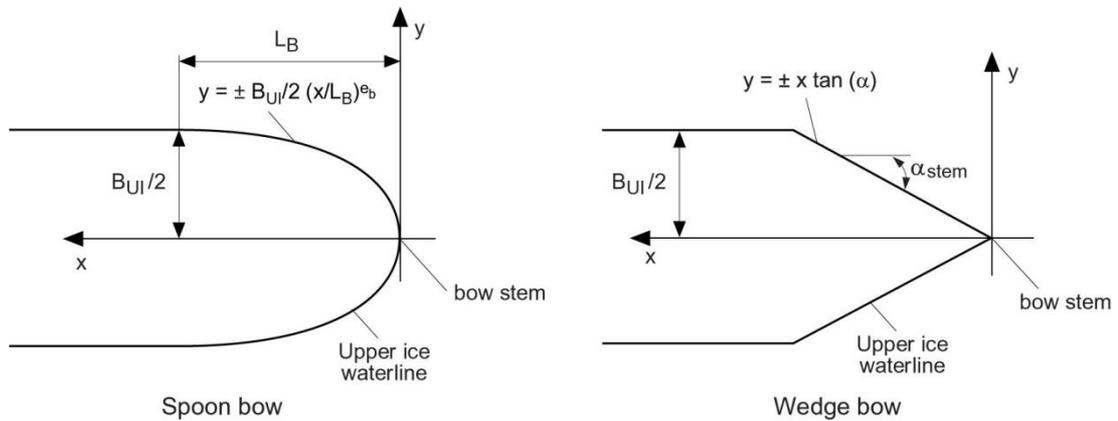

**Figure 8 - Illustration of  $e_b$  effect on the bow shape for  $B_{Ul} = 20$  and  $L_B = 16$**

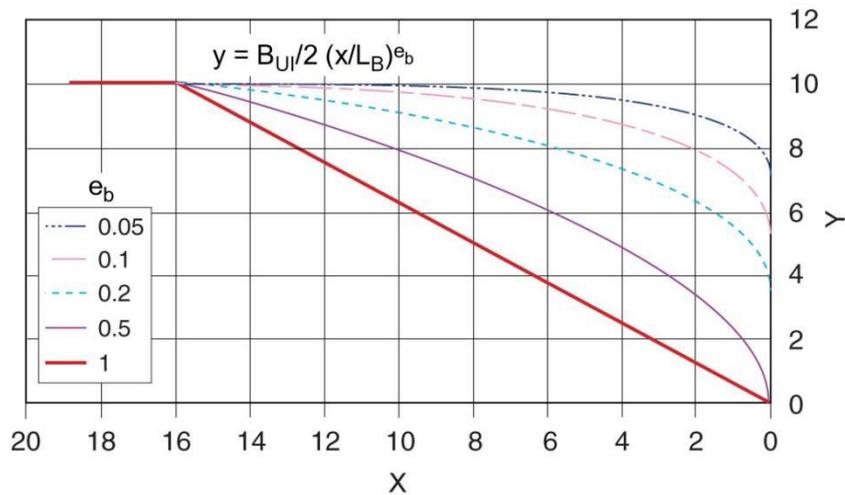

12.13.3 Design vertical shear force

12.13.3.1 The design vertical ice shear force,  $F_I$ , along the hull girder is to be taken as:

$$F_I = C_f \cdot F_{IB} \text{ [MN]}$$

where  $C_f$  = longitudinal distribution factor to be taken as follows:

(a) Positive shear force

- $C_f = 0.0$  between the aft end of  $L_{Ul}$  and  $0.6L_{Ul}$  from aft
- $C_f = 1.0$  between  $0.9 L_{Ul}$  from aft and the forward end of  $L_{Ul}$

(b) Negative shear force

- $C_f = 0.0$  at the aft end of  $L_{Ul}$
- $C_f = -0.5$  between  $0.2 L_{Ul}$  and  $0.6L_{Ul}$  from aft
- $C_f = 0.0$  between  $0.8 L_{Ul}$  from aft and the forward end of  $L_{Ul}$

Intermediate values are to be determined by linear interpolation

## I2 (cont)

I2.13.3.2 The applied vertical shear stress,  $\tau_a$ , is to be determined along the hull girder in a similar manner as in UR S11.5.4.2 by substituting the design vertical ice shear force for the design vertical wave shear force.

I2.13.4 Design vertical ice bending moment

I2.13.4.1 The design vertical ice bending moment,  $M_I$ , along the hull girder is to be taken as:

$$M_I = 0.1 \cdot C_m \cdot L_{UI} \cdot \sin^{-0.2}(\gamma_{stem}) \cdot F_{IB} \text{ [MNm]}$$

where  $L_{UI}$  = length as defined in I2.1.2.1 [m]

$\gamma_{stem}$  is as given in I2.13.2.1

$F_{IB}$  = design vertical ice force at the bow [MN]

$C_m$  = longitudinal distribution factor for design vertical ice bending moment to be taken as follows:

$C_m = 0.0$  at the aft end of  $L_{UI}$

$C_m = 1.0$  between  $0.5L_{UI}$  and  $0.7L_{UI}$  from aft

$C_m = 0.3$  at  $0.95L_{UI}$  from aft

$C_m = 0.0$  at the forward end of  $L_{UI}$

Intermediate values are to be determined by linear interpolation

I2.13.4.2 The applied vertical bending stress,  $\sigma_a$ , is to be determined along the hull girder in a similar manner as in UR S11.5.4.1, by substituting the design vertical ice bending moment for the design vertical wave bending moment. The ship still water bending moment is to be taken as the permissible still water bending moment in sagging condition.

I2.13.5 Longitudinal strength criteria

I2.13.5.1 The strength criteria provided in Table 9 are to be satisfied. The design stress is not to exceed the permissible stress.

**Table 9 - Longitudinal strength criteria**

Failure mode	Applied stress	Permissible stress when $\sigma_y / \sigma_u \leq 0.7$	Permissible stress when $\sigma_y / \sigma_u > 0.7$
Tension	$\sigma_a$	$\eta \cdot \sigma_y$	$\eta \cdot 0.41 (\sigma_u + \sigma_y)$
Shear	$\tau_a$	$\eta \cdot \sigma_y / (3)^{0.5}$	$\eta \cdot 0.41 (\sigma_u + \sigma_y) / (3)^{0.5}$
Buckling	$\sigma_a$	$\sigma_c$ for plating and for web plating of stiffeners $\sigma_c / 1.1$ for stiffeners	
	$\tau_a$	$\tau_c$	

where  $\sigma_a$  = applied vertical bending stress [N/mm<sup>2</sup>]

$\tau_a$  = applied vertical shear stress [N/mm<sup>2</sup>]

$\sigma_y$  = minimum upper yield stress of the material [N/mm<sup>2</sup>]

$\sigma_u$  = ultimate tensile strength of material [N/mm<sup>2</sup>]

$\sigma_c$  = critical buckling stress in compression, according to UR S11.5 [N/mm<sup>2</sup>]

$\tau_c$  = critical buckling stress in shear, according to UR S11.5 [N/mm<sup>2</sup>]

$\eta = 0.8$

$\eta = 0.6$  for ships which are assigned the additional notation "Icebreaker"

**I2**  
(cont)**I2.14 Stem and stern frames**

I2.14.1 The stem and stern frame are to be designed according to the requirements of the Classification Society. For PC6/PC7 ships requiring IAS/IA equivalency, the stem and stern requirements of the Finnish-Swedish Ice Class Rules may need to be additionally considered.

**I2.15 Appendages**

I2.15.1 All appendages are to be designed to withstand forces appropriate for the location of their attachment to the hull structure or their position within a hull area.

I2.15.2 Load definition and response criteria are to be determined by the Classification Society.

**I2.16 Local details**

I2.16.1 For the purpose of transferring ice-induced loads to supporting structure (bending moments and shear forces), local design details are to comply with the requirements of the Classification Society.

I2.16.2 The loads carried by a member in way of cut-outs are not to cause instability. Where necessary, the structure is to be stiffened.

**I2.17 Direct calculations**

I2.17.1 Direct calculations are not to be utilised as an alternative to the analytical procedures prescribed for the shell plating and local frame requirements given in I2.4, I2.6, and I2.7.

I2.17.2 Direct calculations are to be used for load carrying stringers and web frames forming part of a grillage system.

I2.17.3 Where direct calculation is used to check the strength of structural systems, the load patch specified in I2.3 is to be applied, without being combined with any other loads. The load patch is to be applied at locations where the capacity of these members under the combined effects of bending and shear is minimised. Special attention is to be paid to the shear capacity in way of lightening holes and cut-outs in way of intersecting members.

I2.17.4 The strength evaluation of web frames and stringers may be performed based on linear or non-linear analysis. Recognized structural idealisation and calculation methods are to be applied, but the detailed requirements are to be specified by the Classification Society. In the strength evaluation, the guidance given in I2.17.5 and I2.17.6 may generally be considered.

I2.17.5 If the structure is evaluated based on linear calculation methods, the following are to be considered:

- (1) Web plates and flange elements in compression and shear to fulfil relevant buckling criteria as specified by the Classification Society
- (2) Nominal shear stresses in member web plates to be less than  $\sigma_y / \sqrt{3}$
- (3) Nominal von Mises stresses in member flanges to be less than  $1.15 \sigma_y$

**I2**  
**(cont)**

I2.17.6 If the structure is evaluated based on non-linear calculation methods, the following are to be considered:

- (1) The analysis is to reliably capture buckling and plastic deformation of the structure
- (2) The acceptance criteria are to ensure a suitable margin against fracture and major buckling and yielding causing significant loss of stiffness
- (3) Permanent lateral and out-of plane deformation of considered member are to be minor relative to the relevant structural dimensions
- (4) Detailed acceptance criteria to be decided by the Classification Society

**I2.18 Welding**

I2.18.1 All welding within ice-strengthened areas is to be of the double continuous type.

I2.18.2 Continuity of strength is to be ensured at all structural connections.

End of Document
--------------------