

標題

香港籍船の機関区域騒音対策の特別要件

# ClassNK

## テクニカル インフォメーション

No. TEC-0989  
発行日 2014年6月20日

各位

香港政府より Merchant Shipping Information Note (MSIN) No.14/2014 "Clarification on the Applicability Issue relating to IMO Resolution MSC.338(91) regarding the Code on Noise Levels On Board Ships" が発行されており、2012年11月のMSC91において採択された改正 SOLAS 条約 II-1 章第 3-12.2 規則の「機関区域内の機関による騒音を主管庁が定める許容水準まで低減するための措置」の取扱いに関しまして、この規定に従う必要があります。

なお、MSIN No.14/2014 の詳細、MSC.338(91)のコピーは、下記香港政府のウェブページより参照頂けます。(http://www.mardep.gov.hk/en/msnote/msin.html)

### 1. 対象船舶

- (1) 2018年7月1日より前に完工の総トン数1,600トン以上の船舶であり、
  - (i) 建造契約が2014年7月1日より前で、且つ2009年1月1日以降2015年1月1日より前の起工、又は、
  - (ii) 建造契約がない場合、2009年1月1日以降2015年1月1日より前の起工

### 2. 騒音検査記録について

- (1) 2014年7月1日以降に完工する船舶は、総会決議 A.468(XII) "Code on Noise Levels on Board Ships" 4.2.1 項に規定される基準まで機関区域の騒音を軽減する措置を講じ、少なくとも同決議 2.8.3 項、4.2.1 項、4.3 項及び付属書 1 の規定を含めた騒音検査記録を作成することが求められています。
- (2) 2014年7月1日より前の完工で、
  - (i) 海上公試等で騒音計測を行っている船舶は、適当な機関室の騒音検査記録(海上公試の機関室騒音計測結果等)を所持していることが求められています。
  - (ii) 騒音計測を行っていない船舶は、騒音計測を実施のうえ騒音検査記録を作成し備えることが求められており、その騒音検査記録は、船舶の主要目と機関区域の計測データを含めること(すなわち、機関制御室、作業場、過給機、推進機関上部、補助機関/タービン発電機、減速機及び作業場に指定されていない場所)が求められています。

### 3. 確認検査について

2014年7月1日以降2018年7月1日より前の貨物船安全構造証書の最初の更新検査時に、弊会検査員が前 2. で求められている騒音検査記録が船上に備えられていることを確認致します。

(次頁に続く)

#### NOTES:

- ClassNK テクニカル・インフォメーションは、あくまで最新情報の提供のみを目的として発行しています。
- ClassNK 及びその役員、職員、代理もしくは委託事業者のいずれも、掲載情報の正確性及びその情報の利用あるいは依存により発生する、いかなる損失及び費用についても責任は負いかねます。
- バックナンバーは ClassNK インターネット・ホームページ(URL: www.classnk.or.jp)においてご覧いただけます。

なお、本件に関してご不明な点は、以下の部署にお問い合わせください。

一般財団法人 日本海事協会 (ClassNK)

本部 管理センター 機関部

住所: 東京都千代田区紀尾井町 4-7 (郵便番号 102-8567)

Tel.: 03-5226-2022

Fax: 03-5226-2024

E-mail: [mcd@classnk.or.jp](mailto:mcd@classnk.or.jp)

添付:

1. Merchant Shipping Information Note (MSIN) No.14/2014
2. RESOLUTION MSC.338(91)
3. RESOLUTION A.468(XII) "Code on Noise Levels on Board Ships"



# 香 港 商 船 資 訊

## HONG KONG MERCHANT SHIPPING INFORMATION NOTE

### **Clarification on the Applicability Issue relating to IMO Resolution MSC.338(91) regarding the Code on Noise Levels On Board Ships**

*To : Shipowners, Ship Managers, Ship Operators, Masters, Classification Societies and Shipbuilders*

#### *Summary*

The purpose of this Note is to clarify the applicability issue relating to IMO resolution MSC.338(91) on the adoption of amendments to the “International Convention for the Safety of Life at Sea, 1974, as amended” (SOLAS) regarding the Code on noise levels on board ships for applicable Hong Kong registered ships of 1,600 gross tonnage and above.

1. In connection with the Hong Kong Merchant Shipping Information Note No. 2/2014 issued on 2 January 2014 relating to IMO Resolution MSC.338(91) on the adoption of amendments to SOLAS regarding the Code on noise levels on board ships as stipulated in SOLAS chapter II-1, Reg. 3-12, this Note serves to clarify the applicability issue for applicable Hong Kong registered ships of 1,600 gross tonnage and above as follows:-

- (i) According to IMO Maritime Safety Committee Circular (i.e. MSC.1/Circ.1371 issued on 30 July 2010), the IMO Assembly Resolution A.468(XII) - “Code on Noise Levels on Board Ships” is a non-mandatory instrument. As such, the requirements in this Resolution, including noise survey report pursuant to Chapter 4 and the model format in Appendix 1 of Resolution A.468(XII) is not considered as a mandatory requirement for ships with keel laid on or after 1 September 1984 and before 1 January 2009. However, for these ships they should have followed the existing requirements as stipulated in SOLAS, Chapter II-1, Regulation 36, in which measures are required to be taken to reduce machinery noise in machinery spaces to acceptable levels, which are stipulated in paragraph 4.2.1. of A.468(XII).

- (ii) For ships:
  - (a) delivered before 1 July 2018 and fall within the scope of the SOLAS, Chapter II-1 Regulation 3-12.2.1 and 3-12.2.2; and
  - (b) noise level measurement not being carried out and noise survey report not available:

this Administration requires these ships to take measures to reduce machinery noise in machinery spaces to acceptable levels as specified in paragraph 4.2.1 of A.468(XII) and noise survey reports are to be made and should cover at least the requirements in paragraphs 2.8.3, 4.2.1, 4.3 and the model format in Appendix 1 of A.468(XII), not later than the first renewal survey of safety construction certificate on or after 1 July 2014, but before 1 July 2018 in all cases.

For ships delivered before 1 July 2014, noise survey report should include the ship's major particulars and the measuring data covering machinery spaces (i.e. control rooms, workshops, turbocharger, top propulsion machinery, auxiliary diesel engines/turbogenerators, reduction gear and non-specified workspaces).

- (iii) For ships which meet the conditions as prescribed in SOLAS, Chapter II-1, Regulations 3-12.1.1, 3-12.1.2 or 3-12.1.3, they are required to comply with the relevant requirements as stipulated in the IMO Resolution MSC.337(91) and SOLAS, Chapter II-1, Regulations 3-12.3 and 3-12.4.

2. This Administration considered that the party (such as shipyard / ship design consultant / specialist firm) who conducts the noise measurements and issue the noise survey report shall be acceptable to the ship's Recognized Organization. Moreover, noise survey report of a specific ship without actual noise measurements being conducted on board but only referring to the relevant measurements of their sister ships with identical construction and machinery arrangement is considered not acceptable.

3. The details of the codes as annexed to IMO resolutions A.468(XII), MSC.337(91) and the relevant SOLAS amendments MSC.338(91) can be found on the website of Marine Department (<http://www.mardep.gov.hk/en/msnote/msin.html>) as attachments to this Note. Shipowners, ship managers, ship operators, masters, classification societies and shipbuilders of Hong Kong registered ships are required to note the applicability issue contained in this Note and act accordingly.

Marine Department  
Multi-lateral Policy Division

11 April 2014

**ANNEX 2**

**RESOLUTION MSC.338(91)  
(adopted on 30 November 2012)**

**ADOPTION OF AMENDMENTS TO THE INTERNATIONAL CONVENTION  
FOR THE SAFETY OF LIFE AT SEA, 1974, AS AMENDED**

THE MARITIME SAFETY COMMITTEE,

RECALLING Article 28(b) of the Convention on the International Maritime Organization concerning the functions of the Committee,

RECALLING ALSO Article VIII(b) of the International Convention for the Safety of Life at Sea (SOLAS), 1974 (hereinafter referred to as "the Convention"), concerning the amendment procedure applicable to the annex to the Convention, other than to the provisions of chapter I thereof,

HAVING CONSIDERED, at its ninety-first session, amendments to the Convention, proposed and circulated in accordance with Article VIII(b)(i) thereof,

1. ADOPTS, in accordance with Article VIII(b)(iv) of the Convention, amendments to the Convention, the text of which is set out in the annex to the present resolution;
2. DETERMINES, in accordance with Article VIII(b)(vi)(2)(bb) of the Convention, that the said amendments shall be deemed to have been accepted on 1 January 2014, unless, prior to that date, more than one third of the Contracting Governments to the Convention or Contracting Governments the combined merchant fleets of which constitute not less than 50 per cent of the gross tonnage of the world's merchant fleet, have notified their objections to the amendments;
3. INVITES SOLAS Contracting Governments to note that, in accordance with Article VIII(b)(vii)(2) of the Convention, the amendments shall enter into force on 1 July 2014 upon their acceptance in accordance with paragraph 2 above;
4. REQUESTS the Secretary-General, in conformity with Article VIII(b)(v) of the Convention, to transmit certified copies of the present resolution and the text of the amendments contained in the annex to all Contracting Governments to the Convention;
5. ALSO REQUESTS the Secretary-General to transmit copies of this resolution and its annex to Members of the Organization which are not Contracting Governments to the Convention.

\* \* \*

ANNEX

**AMENDMENTS TO THE INTERNATIONAL CONVENTION FOR  
THE SAFETY OF LIFE AT SEA, 1974, AS AMENDED**

**CHAPTER II-1  
CONSTRUCTION – STRUCTURE, SUBDIVISION AND STABILITY,  
MACHINERY AND ELECTRICAL INSTALLATIONS**

**Part A-1  
Structure of ships**

1 The following new regulation 3-12 is added after the existing regulation 3-11:

**"Regulation 3-12 – Protection against noise**

- 1 This regulation shall apply to ships of 1,600 gross tonnage and above:
- .1 for which the building contract is placed on or after 1 July 2014; or
  - .2 in the absence of a building contract, the keels of which are laid or which are at a similar stage of construction on or after 1 January 2015; or
  - .3 the delivery of which is on or after 1 July 2018,

unless the Administration deems that compliance with a particular provision is unreasonable or impractical.

- 2 On ships delivered before 1 July 2018 and:
- .1 contracted for construction before 1 July 2014 and the keels of which are laid or which are at a similar stage of construction on or after 1 January 2009 but before 1 January 2015; or
  - .2 in the absence of a building contract, the keels of which are laid or which are at a similar stage of construction on or after 1 January 2009 but before 1 January 2015,

measures\* shall be taken to reduce machinery noise in machinery spaces to acceptable levels as determined by the Administration. If this noise cannot be sufficiently reduced the source of excessive noise shall be suitably insulated or isolated or a refuge from noise shall be provided if the space is required to be manned. Ear protectors shall be provided for personnel required to enter such spaces, if necessary.

3 Ships shall be constructed to reduce onboard noise and to protect personnel from the noise in accordance with the *Code on noise levels on board ships*, adopted by the Maritime Safety Committee by resolution MSC.337(91), as may be amended by the Organization, provided that such amendments are adopted, brought into force and take effect in accordance with the provisions of Article VIII of the present Convention concerning the amendment procedures

applicable to the annex other than chapter I. For the purpose of this regulation, although the Code on noise levels on board ships is treated as a mandatory instrument, recommendatory parts as specified in chapter I of the Code shall be treated as non-mandatory, provided that amendments to such recommendatory parts are adopted by the Maritime Safety Committee in accordance with its Rules of Procedure.

4 Notwithstanding the requirements of paragraph 1, this regulation does not apply to types of ships listed in paragraph 1.3.4 of the Code on noise levels on board ships.

---

\* Refer to the *Code on Noise levels on board ships*, adopted by the Organization by resolution A.468(XII)."

### **Part C Machinery installations**

2 The existing regulation 36 is deleted and left blank.

## **CHAPTER II-2 CONSTRUCTION – FIRE PROTECTION, FIRE DETECTION AND FIRE EXTINCTION**

### **Part A General**

#### **Regulation 1 – Application**

3 The following footnote is added to the title of Regulation 1:

"\* The application date of 1 July 2012 was introduced by resolution MSC.308(88). However, this resolution amended, under chapter II-2, regulations II-2/3.23 (definition of "Fire Test Procedures Code") and II-2/7.4.1 (new subparagraph .3) only, and all other regulations with the original application date of 1 July 2002 were not amended."

4 In the existing paragraph 2.4, the following new subparagraphs are added after the existing subparagraph .6:

".7 cargo ships of 500 gross tonnage and upwards and passenger ships constructed on or after 1 February 1992 but before 1 July 2002 need not comply with regulation 19.3.3 provided that they comply with regulation 54.2.3 as adopted by resolution MSC.13(57); and

".8 cargo ships of 500 gross tonnage and upwards and passenger ships constructed on or after 1 September 1984 but before 1 July 2002 need not comply with regulations 19.3.1, 19.3.5, 19.3.6, 19.3.9, provided that they comply with regulations 54.2.1, 54.2.5, 54.2.6, 54.2.9 as adopted by resolution MSC.1(XLV)."

5 The following new paragraph 2.5 is added:

"2.5 Ships constructed before 1 July 2012 shall also comply with regulation 10.1.2, as adopted by resolution MSC.338(91)."

### **Part C Suppression of fire**

#### **Regulation 9 – Containment of fire**

6 In table 9.3, column (11) (Special category and ro-ro spaces), row (2) (Corridors), the symbol "A-15" is replaced by the symbol "A-30<sup>g</sup>".

7 In table 9.3, column (11) (Special category and ro-ro spaces), row (4) (Stairways), the symbol "A-15" is replaced by the symbol "A-30<sup>g</sup>".

8 In table 9.3, column and row (11) (Special category and ro-ro spaces), the symbol "A-0" is replaced by the symbol "A-30<sup>g</sup>".

9 In table 9.4, column (11) (Special category and ro-ro spaces), row (1) (Control stations), the symbol "A-30" is replaced by the symbol "A-60<sup>g</sup>".

10 In table 9.4, column (11) (Special category and ro-ro spaces), row (2) (Corridors), the symbol "A-0" is replaced by the symbol "A-30<sup>g</sup>".

11 In table 9.4, column (11) (Special category and ro-ro spaces), row (4) (Stairways), the symbol "A-0" is replaced by the symbol "A-30<sup>g</sup>".

12 In table 9.4, column and row (11) (Special category and ro-ro spaces), the symbol "A-0" is replaced by the symbol "A-30<sup>g</sup>".

13 In table 9.4, column (2) (Corridors), row (11) (Special category and ro-ro spaces), the symbol "A-15" is replaced by the symbol "A-30<sup>g</sup>".

14 In table 9.4, column (4) (Stairways), row (11) (Special category and ro-ro spaces), the symbol "A-15" is replaced by the symbol "A-30<sup>g</sup>".

15 In table 9.4, column (6) (Machinery spaces of category A), row (11) (Special category and ro-ro spaces), the symbol "A-30" is replaced by the symbol "A-60<sup>g</sup>".

16 In table 9.4, a new note is added as follows:

"<sup>g</sup> Ships constructed before 1 July 2014 shall comply, as a minimum, with the previous requirements applicable at the time the ship was constructed, as specified in regulation 1.2."

17 In table 9.5, column and row (11) (Ro-ro and vehicle spaces), the symbol "A-0" is replaced by the symbol "A-30<sup>j</sup>".



18 In table 9.6, column (11) (Ro-ro and vehicle spaces), row (10) (Open decks), the symbol "\*" is replaced by the symbol "A-0<sup>j</sup>".

19 In table 9.6, column and row (11) (Ro-ro and vehicle spaces), the symbol "\*\*h" is replaced by the symbol "A-30<sup>j</sup>".

20 In table 9.6, column (10) (Open decks), row (11) (Ro-ro and vehicle spaces), the symbol "\*" is replaced by the symbol "A-0<sup>j</sup>".

21 In table 9.6, the existing text of note "h" is replaced with the word "deleted".

22 In table 9.6, a new note is added as follows:

"<sup>j</sup> Ships constructed before 1 July 2014 shall comply, as a minimum, with the previous requirements applicable at the time the ship was constructed, as specified in regulation 1.2."

23 Paragraphs 6.2 and 6.3 are deleted and the subsequent paragraphs are renumbered accordingly.

## **Regulation 10 – Fire fighting**

24 In paragraph 5.6.3, the existing subparagraph .1 is replaced by the following:

".1 the fire hazard portions of internal combustion machinery or, for ships constructed before 1 July 2014, the fire hazard portions of internal combustion machinery used for the ship's main propulsion and power generation;"

25 The existing paragraph 10.1 is replaced by the following:

"10.1 Types of firefighter's outfits

.1 Fire-fighter's outfits shall comply with the Fire Safety Systems Code; and

.2 Self-contained compressed air breathing apparatus of fire-fighter's outfits shall comply with paragraph 2.1.2.2 of chapter 3 of the Fire Safety Systems Code by 1 July 2019."

26 After the existing paragraph 10.3, the following new paragraph is added:

"10.4 Fire-fighter's communication

For ships constructed on or after 1 July 2014, a minimum of two two-way portable radiotelephone apparatus for each fire party for fire-fighter's communication shall be carried on board. Those two-way portable radiotelephone apparatus shall be of an explosion-proof type or intrinsically safe. Ships constructed before 1 July 2014 shall comply with the requirements of this paragraph not later than the first survey after 1 July 2018."

## **Part E** **Operational requirements**

### **Regulation 15 – Instructions, onboard training and drills**

27 After the existing paragraph 2.2.5, the following new paragraph is added:

"2.2.6 An onboard means of recharging breathing apparatus cylinders used during drills shall be provided or a suitable number of spare cylinders shall be carried on board to replace those used."

## **Part G** **Special requirements**

### **Regulation 20 – Protection of vehicle, special category and ro-ro spaces**

28 The existing paragraph 6.1, including paragraphs 6.1.1 and 6.1.2, are replaced by the following:

#### **"6.1 Fixed fire-extinguishing systems**

(The requirements of paragraphs 6.1.1 and 6.1.2 shall apply to ships constructed on or after 1 July 2014. Ships constructed before 1 July 2014 shall comply with the previously applicable requirements of paragraphs 6.1.1 and 6.1.2.)

6.1.1 Vehicle spaces and ro-ro spaces, which are not special category spaces and are capable of being sealed from a location outside of the cargo spaces, shall be fitted with one of the following fixed fire-extinguishing systems:

- .1 a fixed gas fire-extinguishing system complying with the provisions of the Fire Safety Systems Code;
- .2 a fixed high-expansion foam fire-extinguishing system complying with the provisions of the Fire Safety Systems Code; or
- .3 a fixed water-based fire fighting system for ro-ro spaces and special category spaces complying with the provisions of the Fire Safety Systems Code and paragraphs 6.1.2.1 to 6.1.2.4.

6.1.2 Vehicle spaces and ro-ro spaces not capable of being sealed and special category spaces shall be fitted with a fixed water-based fire-fighting system for ro-ro spaces and special category spaces complying with the provisions of the Fire Safety Systems Code which shall protect all parts of any deck and vehicle platform in such spaces. Such a water-based fire-fighting system shall have:

- .1 a pressure gauge on the valve manifold;
- .2 clear marking on each manifold valve indicating the spaces served;
- .3 instructions for maintenance and operation located in the valve room; and
- .4 a sufficient number of drainage valves to ensure complete drainage of the system."

**CHAPTER III  
LIFE-SAVING APPLIANCES AND ARRANGEMENTS**

**Part B  
Requirements for ships and life-saving appliances**

29 After existing regulation 17, the following new regulation 17-1 is inserted:

**"Regulation 17-1  
Recovery of persons from the water**

1 All ships shall have ship-specific plans and procedures for recovery of persons from the water, taking into account the guidelines developed by the Organization.\* The plans and procedures shall identify the equipment intended to be used for recovery purposes and measures to be taken to minimize the risk to shipboard personnel involved in recovery operations. Ships constructed before 1 July 2014 shall comply with this requirement by the first periodical or renewal safety equipment survey of the ship to be carried out after 1 July 2014, whichever comes first.

2 Ro-ro passenger ships which comply with regulation 26.4 shall be deemed to comply with this regulation.

---

\* Refer to the Guidelines for the development of plans and procedures for recovery of persons from the water (MSC.1/Circ.1412)."

**APPENDIX  
CERTIFICATES**

30 All the forms of certificates and records of equipment contained in the appendix to the annex are replaced by the following:

**FORM OF SAFETY CERTIFICATE FOR PASSENGER SHIPS**

**PASSENGER SHIP SAFETY CERTIFICATE**

This Certificate shall be supplemented by a Record of Equipment for Passenger Ship Safety (Form P)

(Official seal)

(State)

for *an/a short*<sup>1</sup> international voyage

Issued under the provisions of the  
INTERNATIONAL CONVENTION FOR THE SAFETY OF LIFE  
AT SEA, 1974, as amended

under the authority of the Government of

\_\_\_\_\_ *(name of the State)*

by

\_\_\_\_\_ *(person or organization authorized)*

**Particulars of ship**<sup>2</sup>

Name of ship .....  
 Distinctive number or letters .....  
 Port of registry .....  
 Gross tonnage .....  
 Sea areas in which ship is certified to operate (regulation IV/2) .....  
 IMO Number<sup>3</sup> .....  
 Date of build:  
     Date of building contract .....  
     Date on which keel was laid or ship was at similar stage of construction .....  
     Date of delivery .....  
     Date on which work for a conversion or an alteration or modification of a major  
     character was commenced (where applicable) .....

All applicable dates shall be completed.

**THIS IS TO CERTIFY:**

- 1 That the ship has been surveyed in accordance with the requirements of regulation I/7 of the Convention.
- 2 That the survey showed that:
  - 2.1 the ship complied with the requirements of the Convention as regards:
    - .1 the structure, main and auxiliary machinery, boilers and other pressure vessels;
    - .2 the watertight subdivision arrangements and details;
    - .3 the following subdivision load lines:

Subdivision load lines assigned and marked on the ship's side amidships (regulation II-1/18) <sup>4</sup>	Freeboard	To apply when the spaces in which passengers are carried include the following alternative spaces
P1	.....	.....
P2	.....	.....
P3	.....	.....

<sup>1</sup> Delete as appropriate.  
<sup>2</sup> Alternatively, the particulars of the ship may be placed horizontally in boxes.  
<sup>3</sup> In accordance with *IMO ship identification number scheme*, adopted by the Organization by resolution A.600(15).  
<sup>4</sup> For ships constructed before 1 January 2009, the applicable subdivision notation "C.1, C.2 and C.3" should be used.

- 2.2 the ship complied with the requirements of the Convention as regards structural fire protection, fire safety systems and appliances and fire control plans;
  - 2.3 the life-saving appliances and the equipment of the lifeboats, liferafts and rescue boats were provided in accordance with the requirements of the Convention;
  - 2.4 the ship was provided with a line-throwing appliance and radio installations used in life-saving appliances in accordance with the requirements of the Convention;
  - 2.5 the ship complied with the requirements of the Convention as regards radio installations;
  - 2.6 the functioning of the radio installations used in life-saving appliances complied with the requirements of the Convention;
  - 2.7 the ship complied with the requirements of the Convention as regards shipborne navigational equipment, means of embarkation for pilots and nautical publications;
  - 2.8 the ship was provided with lights, shapes, means of making sound signals and distress signals, in accordance with the requirements of the Convention and the International Regulations for Preventing Collisions at Sea in force;
  - 2.9 in all other respects the ship complied with the relevant requirements of the Convention;
  - 2.10 the ship was/was not<sup>1</sup> subjected to an alternative design and arrangements in pursuance of regulation(s) II-1/55 / II-2/17 / III/38<sup>1</sup> of the Convention;
  - 2.11 a Document of approval of alternative design and arrangements for machinery and electrical installations/fire protection/life-saving appliances and arrangements<sup>1</sup> is/is not<sup>1</sup> appended to this Certificate.
- 3 That an Exemption Certificate has/has not<sup>1</sup> been issued.

***This certificate is valid until*** .....

Completion date of the survey on which this certificate is based: ..... (*dd/mm/yyyy*)

Issued at .....  
(*Place of issue of certificate*)

.....  
(*Date of issue*)

.....  
(*Signature of authorized official issuing the certificate*)

(*Seal or stamp of the issuing authority, as appropriate*)

---

<sup>1</sup> Delete as appropriate.

**RECORD OF EQUIPMENT FOR PASSENGER SHIP SAFETY (FORM P)**

RECORD OF EQUIPMENT FOR COMPLIANCE WITH  
THE INTERNATIONAL CONVENTION FOR THE SAFETY  
OF LIFE AT SEA, 1974, AS AMENDED

**1 Particulars of ship**

Name of ship .....  
Distinctive number or letters .....  
Number of passengers for which certified .....  
Minimum number of persons with required qualifications to operate the radio installations .....

**2 Details of life-saving appliances**

1	Total number of persons for which life-saving appliances are provided .....		
		<b>Port Side</b>	<b>Starboard side</b>
2	Total number of lifeboats	.....	.....
2.1	Total number of persons accommodated by them	.....	.....
2.2	Number of partially enclosed lifeboats (regulation III/21 and LSA Code, section 4.5)	.....	.....
2.3	Number of self-righting partially enclosed lifeboats (regulation III/43 <sup>1</sup> )	.....	.....
2.4	Number of totally enclosed lifeboats (regulation III/21 and LSA Code, section 4.6)	.....	.....
2.5	Other lifeboats		
2.5.1	Number	.....	.....
2.5.2	Type	.....	.....
3	Number of motor lifeboats (included in the total lifeboats shown above)	.....	.....
3.1	Number of lifeboats fitted with searchlights	.....	.....
4	Number of rescue boats	.....	.....
4.1	Number of boats which are included in the total lifeboats shown above	.....	.....
4.2	Number of boats which are fast rescue boats	.....	.....
5	Liferafts		
5.1	Those for which approved launching appliances are required		
5.1.1	Number of liferafts	.....	.....
5.1.2	Number of persons accommodated by them	.....	.....
5.2	Those for which approved launching appliances are not required		
5.2.1	Number of liferafts	.....	.....
5.2.2	Number of persons accommodated by them	.....	.....
6	Number of Marine Evacuation Systems (MES)	.....	.....
6.1	Number of liferafts served by them	.....	.....
6.2	Number of persons accommodated by them	.....	.....
7	Buoyant apparatus		
7.1	Number of apparatus	.....	.....
7.2	Number of persons capable of being supported	.....	.....

<sup>1</sup> Refer to the 1983 amendments to SOLAS (MSC.6(48)), applicable to ships constructed on or after 1 July 1986, but before 1 July 1998.

2 **Details of life-saving appliances (continued)**

8	Number of lifebuoys	.....
9	Number of lifejackets (total)	.....
9.1	Number of adult lifejackets	.....
9.2	Number of child lifejackets	.....
9.3	Number of infant lifejackets	.....
10	Immersion suits	.....
10.1	Total number	.....
10.2	Number of suits complying with the requirements for lifejackets	.....
11	Number of anti-exposure suits	.....
12	Number of thermal protective aids <sup>2</sup>	.....
13	Radio installations used in life-saving appliances	.....
13.1	Number of search and rescue locating devices	.....
13.1.1	Radar search and rescue transponders (SART)	.....
13.1.2	AIS search and rescue transmitters (AIS-SART)	.....
13.2	Number of two-way VHF radiotelephone apparatus	.....

3 **Details of radio facilities**

Item		Actual provision
1	Primary systems	
1.1	VHF radio installation	
1.1.1	DSC encoder	.....
1.1.2	DSC watch receiver	.....
1.1.3	Radiotelephony	.....
1.2	MF radio installation	
1.2.1	DSC encoder	.....
1.2.2	DSC watch receiver	.....
1.2.3	Radiotelephony	.....
1.3	MF/HF radio installation	
1.3.1	DSC encoder	.....
1.3.2	DSC watch receiver	.....
1.3.3	Radiotelephony	.....
1.3.4	Direct-printing radiotelegraphy	.....
1.4	Inmarsat ship earth station	.....
2	Secondary means of alerting	.....
3	Facilities for reception of maritime safety information	
3.1	NAVTEX receiver	.....
3.2	EGC receiver	.....
3.3	HF direct-printing radiotelegraph receiver	.....
4	Satellite EPIRB	
4.1	COSPAS-SARSAT	.....
5	VHF EPIRB	.....
6	Ship's search and rescue locating device	
6.1	Radar search and rescue transponder (SART)	.....
6.2	AIS search and rescue transmitter (AIS- SART)	.....

<sup>2</sup> Excluding those required by the LSA Code, paragraphs 4.1.5.1.24, 4.4.8.31 and 5.1.2.2.13.

4 **Methods used to ensure availability of radio facilities** (regulations IV/15.6 and 15.7)

- 4.1 Duplication of equipment .....
- 4.2 Shore-based maintenance .....
- 4.3 At-sea maintenance capability.....

5 **Details of navigational systems and equipment**

Item	Actual provision
1.1	Standard magnetic compass <sup>3</sup> .....
1.2	Spare magnetic compass <sup>3</sup> .....
1.3	Gyro-compass <sup>3</sup> .....
1.4	Gyro-compass heading repeater <sup>3</sup> .....
1.5	Gyro-compass bearing repeater <sup>3</sup> .....
1.6	Heading or track control system <sup>3</sup> .....
1.7	Pelorus or compass bearing device <sup>3</sup> .....
1.8	Means of correcting heading and bearings .....
1.9	Transmitting heading device (THD) <sup>3</sup> .....
2.1	Nautical charts/Electronic chart display and information system (ECDIS) <sup>4</sup> .....
2.2	Back-up arrangements for ECDIS .....
2.3	Nautical publications .....
2.4	Back-up arrangements for electronic nautical publications .....
3.1	Receiver for a global navigation satellite system/terrestrial radionavigation system <sup>3,4</sup> .....
3.2	9 GHz radar <sup>3</sup> .....
3.3	Second radar (3 GHz/9 GHz <sup>4</sup> ) <sup>3</sup> .....
3.4	Automatic radar plotting aid (ARPA) <sup>3</sup> .....
3.5	Automatic tracking aid <sup>3</sup> .....
3.6	Second automatic tracking aid <sup>3</sup> .....
3.7	Electronic plotting aid <sup>3</sup> .....
4.1	Automatic identification system (AIS) .....
4.2	Long-range identification and tracking system .....
5	Voyage data recorder (VDR) .....
6.1	Speed and distance measuring device (through the water) <sup>3</sup> .....
6.2	Speed and distance measuring device (over the ground in the forward and athwartships direction) <sup>3</sup> .....
7	Echo-sounding device <sup>3</sup> .....
8.1	Rudder, propeller, thrust, pitch and operational mode indicator <sup>3</sup> .....
8.2	Rate-of-turn indicator <sup>3</sup> .....
9	Sound reception system <sup>3</sup> .....
10	Telephone to emergency steering position <sup>3</sup> .....
11	Daylight signalling lamp <sup>3</sup> .....
12	Radar reflector <sup>3</sup> .....
13	International Code of Signals .....
14	IAMSAR Manual, Volume III .....
15	Bridge navigational watch alarm system (BNWAS) .....

<sup>3</sup> Alternative means of meeting this requirement are permitted under regulation V/19. In case of other means they shall be specified.  
<sup>4</sup> Delete as appropriate.



***THIS IS TO CERTIFY*** that this Record is correct in all respects.

Issued at .....  
*(Place of issue of the Record)*

.....  
*(Date of issue)*

.....  
*(Signature of duly authorized official issuing the Record)*

*(Seal or stamp of the issuing authority, as appropriate)*

**FORM OF SAFETY CONSTRUCTION CERTIFICATE FOR CARGO SHIPS**

**CARGO SHIP SAFETY CONSTRUCTION CERTIFICATE**

(Official seal)

(State)

Issued under the provisions of the  
INTERNATIONAL CONVENTION FOR THE SAFETY OF LIFE AT SEA, 1974, as amended  
under the authority of the Government of

\_\_\_\_\_  
(name of the State)

by

\_\_\_\_\_  
(person or organization authorized)

**Particulars of ship<sup>1</sup>**

Name of ship .....  
Distinctive number or letters.....  
Port of registry .....  
Gross tonnage .....  
Deadweight of ship (metric tons)<sup>2</sup> .....  
IMO Number<sup>3</sup> .....

**Type of ship<sup>4</sup>**

Bulk carrier  
Oil tanker  
Chemical tanker  
Gas carrier  
Cargo ship other than any of the above

**Date of build:**

Date of building contract .....  
Date on which keel was laid or ship was at similar stage of construction .....  
Date of delivery .....  
Date on which work for a conversion or an alteration or modification of a major character  
was commenced (where applicable) .....

All applicable dates shall be completed.

---

<sup>1</sup> Alternatively, the particulars of the ship may be placed horizontally in boxes.

<sup>2</sup> For oil tankers, chemical tankers and gas carriers only.

<sup>3</sup> In accordance with the *IMO ship identification number scheme*, adopted by the Organization by resolution A.600(15).

<sup>4</sup> Delete as appropriate.

**THIS IS TO CERTIFY:**

1. That the ship has been surveyed in accordance with the requirements of regulation I/10 of the Convention.
2. That the survey showed that the condition of the structure, machinery and equipment as defined in the above regulation was satisfactory and the ship complied with the relevant requirements of chapters II-1 and II-2 of the Convention (other than those relating to fire safety systems and appliances and fire control plans).
3. That an Exemption Certificate has/has not<sup>4</sup> been issued.
4. That the ship was/was not<sup>4</sup> subjected to an alternative design and arrangements in pursuance of regulation(s) II-1/55 / II-2/17<sup>4</sup> of the Convention.
5. That a Document of approval of alternative design and arrangements for machinery and electrical installations/fire protection<sup>4</sup> is/is not<sup>4</sup> appended to this Certificate.

***This certificate is valid until*** .....

Completion date of the survey on which this certificate is based: ..... (dd/mm/yyyy)

Issued at .....  
(Place of issue of certificate)

.....  
(Date of issue)

.....  
(Signature of authorized official issuing the certificate)

(Seal or stamp of the issuing authority, as appropriate)

---

<sup>4</sup> Delete as appropriate.

**FORM OF SAFETY EQUIPMENT CERTIFICATE FOR CARGO SHIPS**

**CARGO SHIP SAFETY EQUIPMENT CERTIFICATE**

This Certificate shall be supplemented by a Record of Equipment for Cargo Ship Safety (Form E)

(Official seal)

(State)

Issued under the provisions of the  
INTERNATIONAL CONVENTION FOR THE SAFETY OF LIFE AT SEA, 1974, as amended  
under the authority of the Government of

\_\_\_\_\_  
(name of the State)

by

\_\_\_\_\_  
(person or organization authorized)

**Particulars of ship<sup>1</sup>**

Name of ship .....  
Distinctive number or letters .....  
Port of registry.....  
Gross tonnage.....  
Deadweight of ship (metric tons)<sup>2</sup> .....  
Length of ship (regulation III/3.12) .....  
IMO Number<sup>3</sup> .....

Type of ship<sup>4</sup>

- Bulk carrier
- Oil tanker
- Chemical tanker
- Gas carrier
- Cargo ship other than any of the above

Date on which keel was laid or ship was at a similar stage of construction or, where applicable, date on which work for a conversion or an alteration or modification of a major character was commenced .....

**THIS IS TO CERTIFY:**

- 1 That the ship has been surveyed in accordance with the requirements of regulation I/8 of the Convention.
- 2 That the survey showed that:
  - 2.1 the ship complied with the requirements of the Convention as regards fire safety systems and appliances and fire control plans;

---

<sup>1</sup> Alternatively, the particulars of the ship may be placed horizontally in boxes.

<sup>2</sup> For oil tankers, chemical tankers and gas carriers only.

<sup>3</sup> In accordance with the *IMO ship identification number scheme*, adopted by the Organization by resolution A.600(15).

<sup>4</sup> Delete as appropriate.

- 2.2 the life-saving appliances and the equipment of the lifeboats, liferafts and rescue boats were provided in accordance with the requirements of the Convention;
- 2.3 the ship was provided with a line-throwing appliance and radio installations used in life-saving appliances in accordance with the requirements of the Convention;
- 2.4 the ship complied with the requirements of the Convention as regards shipborne navigational equipment, means of embarkation for pilots and nautical publications;
- 2.5 the ship was provided with lights, shapes and means of making sound signals and distress signals in accordance with the requirements of the Convention and the International Regulations for Preventing Collisions at Sea in force;
- 2.6 in all other respects the ship complied with the relevant requirements of the Convention;
- 2.7 the ship was/was not<sup>4</sup> subjected to an alternative design and arrangements in pursuance of regulation(s) II-2/17 / III/38<sup>4</sup> of the Convention;
- 2.8 a Document of approval of alternative design and arrangements for fire protection/ life-saving appliances and arrangements<sup>4</sup> is/is not<sup>4</sup> appended to this Certificate.
- 3 That the ship operates in accordance with regulation III/26.1.1.1<sup>5</sup> within the limits of the trade area .....
- 4 That an Exemption Certificate has/has not<sup>4</sup> been issued.

***This certificate is valid until***.....

Completion date of the survey on which this certificate is based: ..... (dd/mm/yyyy)

Issued at.....  
(Place of issue of certificate)

.....  
(Date of issue)

.....  
(Signature of authorized official issuing the certificate)

(Seal or stamp of the issuing authority, as appropriate)

<sup>4</sup> Delete as appropriate.

<sup>5</sup> Refer to the 1983 amendments to SOLAS (MSC.6(48)), applicable to ships constructed on or after 1 July 1986, but before 1 July 1998 in the case of self-righting partially enclosed lifeboat(s) on board.

**RECORD OF EQUIPMENT FOR CARGO SHIP SAFETY (FORM E)**

RECORD OF EQUIPMENT FOR COMPLIANCE WITH  
THE INTERNATIONAL CONVENTION FOR THE SAFETY  
OF LIFE AT SEA, 1974, AS AMENDED

**1 Particulars of ship**

Name of ship .....

Distinctive number or letters .....

**2 Details of life-saving appliances**

1	Total number of persons for which life-saving appliances are provided .....		
		<b>Port side</b>	<b>Starboard side</b>
2	Total number of lifeboats	.....	.....
2.1	Total number of persons accommodated by them	.....	.....
2.2	Number of self-righting partially enclosed lifeboats (regulation III/43 <sup>1</sup> )	.....	.....
2.3	Number of totally enclosed lifeboats (regulation III/31 and LSA Code, section 4.6)	.....	.....
2.4	Number of lifeboats with a self-contained air support system (regulation III/31 and LSA Code, section 4.8)	.....	.....
2.5	Number of fire-protected lifeboats (regulation III/31 and LSA Code, section 4.9)	.....	.....
2.6	Other lifeboats		
2.6.1	Number	.....	.....
2.6.2	Type	.....	.....
2.7	Number of free-fall lifeboats	.....	.....
2.7.1	Totally enclosed (regulation III/31 and LSA Code, section 4.7)	.....	.....
2.7.2	Self-contained (regulation III/31 and LSA Code, section 4.8)	.....	.....
2.7.3	Fire-protected (regulation III/31 and LSA Code, section 4.9)	.....	.....
3	Number of motor lifeboats (included in the total lifeboats shown above)	.....	.....
3.1	Number of lifeboats fitted with searchlights	.....	.....
4	Number of rescue boats	.....	.....
4.1	Number of boats which are included in the total lifeboats shown above	.....	.....
5	Liferafts		
5.1	Those for which approved launching appliances are required		
5.1.1	Number of liferafts	.....	.....
5.1.2	Number of persons accommodated by them	.....	.....

<sup>1</sup> Refer to the 1983 amendments to SOLAS (MSC.6(48)), applicable to ships constructed on or after 1 July 1986, but before 1 July 1998.

2 **Details of life-saving appliances (continued)**

5.2	Those for which approved launching appliances are not required	
5.2.1	Number of liferafts	.....
5.2.2	Number of persons accommodated by them	.....
5.3	Number of liferafts required by regulation III/31.1.4	.....
6	Number of lifebuoys	.....
7	Number of lifejackets	.....
8	Immersion suits	
8.1	Total number	.....
8.2	Number of suits complying with the requirements for lifejackets	.....
9	Number of anti-exposure suits	.....
10	Radio installations used in life-saving appliances	
10.1	Number of search and rescue locating devices	
10.1.1	Radar search and rescue transponders (SART)	.....
10.1.2	AIS search and rescue transmitters (AIS-SART)	.....
10.2	Number of two-way VHF radiotelephone apparatus	.....

3 **Details of navigational systems and equipment**

Item	Actual provision
1.1 Standard magnetic compass <sup>2</sup>	.....
1.2 Spare magnetic compass <sup>2</sup>	.....
1.3 Gyro-compass <sup>2</sup>	.....
1.4 Gyro-compass heading repeater <sup>2</sup>	.....
1.5 Gyro-compass bearing repeater <sup>2</sup>	.....
1.6 Heading or track control system <sup>2</sup>	.....
1.7 Pelorus or compass bearing device <sup>2</sup>	.....
1.8 Means of correcting heading and bearings	.....
1.9 Transmitting heading device (THD) <sup>2</sup>	.....
2.1 Nautical charts/Electronic chart display and information system (ECDIS) <sup>3</sup>	.....
2.2 Back-up arrangements for ECDIS	.....
2.3 Nautical publications	.....
2.4 Back-up arrangements for electronic nautical publications	.....
3.1 Receiver for a global navigation satellite system/terrestrial radionavigation system <sup>2, 3</sup>	.....
3.2 9 GHz radar <sup>2</sup>	.....
3.3 Second radar (3 GHz/9 GHz <sup>3</sup> ) <sup>2</sup>	.....
3.4 Automatic radar plotting aid (ARPA) <sup>2</sup>	.....
3.5 Automatic tracking aid <sup>2</sup>	.....
3.6 Second automatic tracking aid <sup>2</sup>	.....
3.7 Electronic plotting aid <sup>2</sup>	.....

<sup>2</sup> Alternative means of meeting this requirement are permitted under regulation V/19. In case of other means, they shall be specified.

<sup>3</sup> Delete as appropriate.

3 **Details of navigational systems and equipment** (continued)

Item	Actual provision
4.1 Automatic identification system (AIS)	.....
4.2 Long-range identification and tracking system	.....
5.1 Voyage data recorder (VDR) <sup>3</sup>	.....
5.2 Simplified voyage data recorder (S-VDR) <sup>3</sup>	.....
6.1 Speed and distance measuring device (through the water) <sup>2</sup>	.....
6.2 Speed and distance measuring device (over the ground in the forward and athwartships direction) <sup>2</sup>	.....
7 Echo-sounding device <sup>2</sup>	.....
8.1 Rudder, propeller, thrust, pitch and operational mode indicator <sup>2</sup>	.....
8.2 Rate-of-turn indicator <sup>2</sup>	.....
9 Sound reception system <sup>2</sup>	.....
10 Telephone to emergency steering position <sup>2</sup>	.....
11 Daylight signalling lamp <sup>2</sup>	.....
12 Radar reflector <sup>2</sup>	.....
13 International Code of Signals	.....
14 IAMSAR Manual, Volume III	.....
15 Bridge navigational watch alarm system (BNWAS)	.....

**THIS IS TO CERTIFY** that this Record is correct in all respects.

Issued at .....  
(Place of issue of the Record)

.....  
(Date of issue)

.....  
(Signature of duly authorized official issuing the Record)

(Seal or stamp of the issuing authority, as appropriate)

<sup>2</sup> Alternative means of meeting this requirement are permitted under regulation V/19. In case of other means, they shall be specified.

<sup>3</sup> Delete as appropriate.



**FORM OF SAFETY RADIO CERTIFICATE FOR CARGO SHIPS**

**CARGO SHIP SAFETY RADIO CERTIFICATE**

This Certificate shall be supplemented by a Record of Equipment  
for Cargo Ship Safety Radio (Form R)

(Official seal)

(State)

Issued under the provisions of the  
INTERNATIONAL CONVENTION FOR THE SAFETY OF LIFE  
AT SEA, 1974, as amended

under the authority of the Government of

\_\_\_\_\_  
(name of the State)

by

\_\_\_\_\_  
(person or organization authorized)

**Particulars of ship<sup>1</sup>**

Name of ship .....  
Distinctive number or letters .....  
Port of registry .....  
Gross tonnage .....  
Sea areas in which ship is certified to operate (regulation IV/2) .....  
IMO Number<sup>2</sup> .....  
Date on which keel was laid or ship was at a similar stage of construction or,  
where applicable, date on which work for a conversion or an alteration or  
modification of a major character was commenced .....

**THIS IS TO CERTIFY:**

- 1 That the ship has been surveyed in accordance with the requirements of regulation I/9 of the Convention.
- 2 That the survey showed that:
  - 2.1 the ship complied with the requirements of the Convention as regards radio installations;
  - 2.2 the functioning of the radio installations used in life-saving appliances complied with the requirements of the Convention.
- 3 That an Exemption Certificate has/has not<sup>3</sup> been issued.

<sup>1</sup> Alternatively, the particulars of the ship may be placed horizontally in boxes.

<sup>2</sup> In accordance with the *IMO ship identification number scheme*, adopted by the Organization by resolution A.600(15).

<sup>3</sup> Delete as appropriate.

***This certificate is valid until***.....

Completion date of the survey on which this certificate is based: ..... (dd/mm/yyyy)

Issued at .....  
(Place of issue of certificate)

.....  
(Date of issue)

.....  
(Signature of authorized official issuing the certificate)

(Seal or stamp of the issuing authority, as appropriate)

**RECORD OF EQUIPMENT FOR CARGO SHIP SAFETY RADIO (FORM R)**

RECORD OF EQUIPMENT FOR COMPLIANCE  
WITH THE INTERNATIONAL CONVENTION FOR THE SAFETY  
OF LIFE AT SEA, 1974, AS AMENDED

**1 Particulars of ship**

Name of ship .....  
Distinctive number or letters .....  
Minimum number of persons with required  
qualifications to operate the radio installations .....

**2 Details of radio facilities**

Item		Actual provision
1	Primary systems	
1.1	VHF radio installation	
1.1.1	DSC encoder	.....
1.1.2	DSC watch receiver	.....
1.1.3	Radiotelephony	.....
1.2	MF radio installation	
1.2.1	DSC encoder	.....
1.2.2	DSC watch receiver	.....
1.2.3	Radiotelephony	.....
1.3	MF/HF radio installation	
1.3.1	DSC encoder	.....
1.3.2	DSC watch receiver	.....
1.3.3	Radiotelephony	.....
1.3.4	Direct-printing telegraphy	.....
1.4	Inmarsat ship earth station	.....
2	Secondary means of alerting	.....
3	Facilities for reception of maritime safety information	
3.1	NAVTEX receiver	.....
3.2	EGC receiver	.....
3.3	HF direct-printing radiotelegraph receiver	.....
4	Satellite EPIRB	.....
4.1	COSPAS-SARSAT	.....
5	VHF EPIRB	.....
6	Ship's search and rescue locating device	
6.1	Radar search and rescue transponder (SART)	.....
6.2	AIS search and rescue transmitter (AIS-SART)	.....

- 3 **Methods used to ensure availability of radio facilities** (regulations IV/15.6 and 15.7)
- 3.1 Duplication of equipment .....
- 3.2 Shore-based maintenance .....
- 3.3 At-sea maintenance capability .....

**THIS IS TO CERTIFY** that this Record is correct in all respects.

Issued at .....  
(Place of issue of the Record)

.....  
(Date of issue)

.....  
(Signature of duly authorized official issuing the Record)

(Seal or stamp of the issuing authority, as appropriate)

**FORM OF EXEMPTION CERTIFICATE**

**EXEMPTION CERTIFICATE**

(Official seal)

(State)

Issued under the provisions of the  
INTERNATIONAL CONVENTION FOR THE SAFETY OF LIFE  
AT SEA, 1974, as amended

under the authority of the Government of

\_\_\_\_\_ (name of the State)

by

\_\_\_\_\_ (person or organization authorized)

**Particulars of ship<sup>1</sup>**

Name of ship .....  
Distinctive number or letters .....  
Port of registry .....  
Gross tonnage .....  
IMO Number<sup>2</sup> .....

**THIS IS TO CERTIFY:**

That the ship is, under the authority conferred by regulation.....  
of the Convention, exempted from the requirements of .....  
..... of the Convention.

Conditions, if any, on which the Exemption Certificate is granted:

.....  
.....

Voyages, if any, for which the Exemption Certificate is granted:

.....  
.....

**This certificate is valid until**..... subject  
to the ..... Certificate,  
to which this certificate is attached, remaining valid.

Issued at.....  
(Place of issue of certificate)

.....  
(Date of issue)

.....  
(Signature of authorized official issuing the certificate)

(Seal or stamp of the issuing authority, as appropriate)

<sup>1</sup> Alternatively, the particulars of the ship may be placed horizontally in boxes.

<sup>2</sup> In accordance with the *IMO ship identification number scheme*, adopted by the Organization by resolution A.600(15).

**FORM OF NUCLEAR PASSENGER SHIP SAFETY CERTIFICATE**

**NUCLEAR PASSENGER SHIP SAFETY CERTIFICATE**

This Certificate shall be supplemented by a Record of Equipment for Passenger Ship Safety (Form P)

(Official seal)

(State)

for an/a short<sup>1</sup> international voyage

Issued under the provisions of the  
INTERNATIONAL CONVENTION FOR THE SAFETY OF LIFE  
AT SEA, 1974, as amended

under the authority of the Government of

\_\_\_\_\_ *(name of the State)*

by

\_\_\_\_\_ *(person or organization authorized)*

**Particulars of ship<sup>2</sup>**

Name of ship .....  
Distinctive number or letters .....  
Port of registry .....  
Gross tonnage .....  
Sea areas in which ship is certified to operate (regulation IV/2) .....  
IMO Number<sup>3</sup> .....

Date of build:

Date of building contract .....  
Date on which keel was laid or ship was at similar stage of construction .....  
Date of delivery .....  
Date on which work for a conversion or an alteration or modification of a major character  
was commenced (where applicable) .....

All applicable dates shall be completed.

**THIS IS TO CERTIFY:**

- 1 That the ship has been surveyed in accordance with the requirements of regulation VIII/9 of the Convention.
- 2 That the ship, being a nuclear ship, complied with all the requirements of chapter VIII of the Convention and conformed to the Safety Assessment approved for the ship; and that:
  - 2.1 the ship complied with the requirements of the Convention as regards:
    - .1 the structure, main and auxiliary machinery, boilers and other pressure vessels, including the nuclear propulsion plant and the collision protective structure;

---

<sup>1</sup> Delete as appropriate.

<sup>2</sup> Alternatively, the particulars of the ship may be placed horizontally in boxes.

<sup>3</sup> In accordance with the *IMO ship identification number scheme*, adopted by the Organization by resolution A.600(15).



**FORM OF NUCLEAR CARGO SHIP SAFETY CERTIFICATE**

**NUCLEAR CARGO SHIP SAFETY CERTIFICATE**

This Certificate shall be supplemented by a Record of Equipment for Cargo Ship Safety (Form C)

(Official seal)

(State)

Issued under the provisions of the

INTERNATIONAL CONVENTION FOR THE SAFETY OF LIFE  
AT SEA, 1974, as amended

under the authority of the Government of

\_\_\_\_\_ *(name of the State)*

by

\_\_\_\_\_ *(person or organization authorized)*

**Particulars of ship<sup>1</sup>**

Name of ship .....  
Distinctive number or letters .....  
Port of registry .....  
Gross tonnage .....  
Deadweight of ship (metric tons)<sup>2</sup> .....  
Length of ship (regulation III/3.12) .....  
Sea areas in which ship is certified to operate (regulation IV/2) .....  
IMO Number<sup>3</sup> .....

**Type of ship<sup>4</sup>**

- Bulk carrier
- Oil tanker
- Chemical tanker
- Gas carrier
- Cargo ship other than any of the above

**Date of build:**

Date of building contract .....  
Date on which keel was laid or ship was at similar stage of construction .....  
Date of delivery .....  
Date on which work for a conversion or an alteration or modification of a major character  
was commenced (where applicable) .....

All applicable dates shall be completed.

---

1 Alternatively, the particulars of the ship may be placed horizontally in boxes.  
2 For oil tankers, chemical tankers and gas carriers only.  
3 In accordance with the *IMO ship identification number scheme*, adopted by the Organization by resolution A.600(15).  
4 Delete as appropriate.



**THIS IS TO CERTIFY:**

- 1 That the ship has been surveyed in accordance with the requirements of regulation VIII/9 of the Convention.
- 2 That the ship, being a nuclear ship, complied with all the requirements of chapter VIII of the Convention and conformed to the Safety Assessment approved for the ship; and that:
  - 2.1 the condition of the structure, machinery and equipment as defined in regulation I/10 (as applicable to comply with regulation VIII/9), including the nuclear propulsion plant and the collision protective structure, was satisfactory and the ship complied with the relevant requirements of chapter II-1 and chapter II-2 of the Convention (other than those relating to fire safety systems and appliances and fire control plans);
  - 2.2 the ship complied with the requirements of the Convention as regards fire safety systems and appliances and fire control plans;
  - 2.3 the life-saving appliances and the equipment of the lifeboats, liferafts and rescue boats were provided in accordance with the requirements of the Convention;
  - 2.4 the ship was provided with a line-throwing appliance and radio installations used in life-saving appliances in accordance with the requirements of the Convention;
  - 2.5 the ship complied with the requirements of the Convention as regards radio installations;
  - 2.6 the functioning of the radio installations used in life-saving appliances complied with the requirements of the Convention;
  - 2.7 the ship complied with the requirements of the Convention as regards shipborne navigational equipment, means of embarkation for pilots and nautical publications;
  - 2.8 the ship was provided with lights, shapes, means of making sound signals and distress signals, in accordance with the requirements of the Convention and the International Regulations for Preventing Collisions at Sea in force;
  - 2.9 in all other respects the ship complied with the relevant requirements of the regulations, so far as these requirements apply thereto;
  - 2.10 the ship was/was not<sup>3</sup> subjected to an alternative design and arrangements in pursuance of regulation(s) II-1/55 / II-2/17 / III/38<sup>3</sup> of the Convention;
  - 2.11 a Document of approval of alternative design and arrangements for machinery and electrical installations/fire protection/life-saving appliance and arrangements<sup>3</sup> is/is not<sup>3</sup> appended to this Certificate.

***This certificate is valid until*** .....

Completion date of the survey on which this certificate is based: ..... (dd/mm/yyyy)

Issued at .....  
(Place of issue of certificate)

.....  
(Date of issue)

.....  
(Signature of authorized official issuing the certificate)

(Seal or stamp of the issuing authority, as appropriate)

---

<sup>3</sup> Delete as appropriate.

**RECORD OF EQUIPMENT FOR CARGO SHIP SAFETY (FORM C)**

RECORD OF EQUIPMENT FOR COMPLIANCE WITH  
THE INTERNATIONAL CONVENTION FOR THE SAFETY OF  
LIFE AT SEA, 1974, AS AMENDED

**1 Particulars of ship**

Name of ship.....  
Distinctive number or letters.....  
Minimum number of persons with required qualifications to operate the radio installations .....

**2 Details of life-saving appliances**

1 Total number of persons for which life-saving appliances are provided:		
	Port side	Starboard side
2 Total number of lifeboats	.....	.....
2.1 Total number of persons accommodated by them	.....	.....
2.2 Number of self-righting partially enclosed lifeboats (regulation III/43 <sup>1</sup> )	.....	.....
2.3 Number of totally enclosed lifeboats (regulation III/31 and LSA Code, section 4.6)	.....	.....
2.4 Number of lifeboats with a self-contained air support system (regulation III/31 and LSA Code, section 4.8)	.....	.....
2.5 Number of fire-protected lifeboats (regulation III/31 and LSA Code, section 4.9)	.....	.....
2.6 Other lifeboats		
2.6.1 Number	.....	.....
2.6.2 Type	.....	.....
2.7 Number of free-fall lifeboats	.....	.....
2.7.1 Totally enclosed (regulation III/31 and LSA Code, section 4.7)	.....	.....
2.7.2 Self-contained (regulation III/31 and LSA Code, section 4.8)	.....	.....
2.7.3 Fire-protected (regulation III/31 and LSA Code, section 4.9)	.....	.....
3 Number of motor lifeboats (included in the total lifeboats shown above)	.....	.....
3.1 Number of lifeboats fitted with searchlights	.....	.....
4 Number of rescue boats	.....	.....
4.1 Number of boats which are included in the total lifeboats shown above	.....	.....

<sup>1</sup> Refer to the 1983 amendments to SOLAS (MSC.6(48)), applicable to ships constructed on or after 1 July 1986, but before 1 July 1998.

2 **Details of life-saving appliances** (continued)

5	Liferafts	
5.1	Those for which approved launching appliances are required	
5.1.1	Number of liferafts	.....
5.1.2	Number of persons accommodated by them	.....
5.2	Those for which approved launching appliances are not required	
5.2.1	Number of liferafts	.....
5.2.2	Number of persons accommodated by them	.....
5.3	Number of liferafts required by regulation III/31.1.4	.....
6	Number of lifebuoys	.....
7	Number of lifejackets	.....
8	Immersion suits	
8.1	Total number	.....
8.2	Number of suits complying with the requirements for lifejackets	.....
9	Number of anti-exposure suits	.....
10	Radio installations used in life-saving appliances	
10.1	Number of search and rescue locating devices	
10.1.1	Radar search and rescue transponders (SART)	.....
10.1.2	AIS search and rescue transmitters (AIS-SART)	.....
10.2	Number of two-way VHF radiotelephone apparatus	.....

3 **Details of radio facilities**

Item		Actual provision
1	Primary systems	
1.1	VHF radio installation	
1.1.1	DSC encoder	.....
1.1.2	DSC watch receiver	.....
1.1.3	Radiotelephony	.....
1.2	MF radio installation	
1.2.1	DSC encoder	.....
1.2.2	DSC watch receiver	.....
1.2.3	Radiotelephony	.....
1.3	MF/HF radio installation	
1.3.1	DSC encoder	.....
1.3.2	DSC watch receiver	.....
1.3.3	Radiotelephony	.....
1.3.4	Direct-printing telegraphy	.....
1.4	Inmarsat ship earth station	.....
2	Secondary means of alerting	.....
3	Facilities for reception of maritime safety information	
3.1	NAVTEX receiver	.....
3.2	EGC receiver	.....
3.3	HF direct-printing radiotelegraph receiver	.....
4	Satellite EPIRB	
4.1	COSPAS-SARSAT	.....
5	VHF EPIRB	.....
6	Ship's search and rescue locating device	
6.1	Radar search and rescue transponder (SART)	.....
6.2	AIS search and rescue transmitter (AIS-SART)	.....

4 **Methods used to ensure availability of radio facilities** (regulations IV/15.6 and 15.7)

- 4.1 Duplication of equipment .....
- 4.2 Shore-based maintenance .....
- 4.3 At-sea maintenance capability .....

5 **Details of navigational systems and equipment**

Item		Actual provision
1.1	Standard magnetic compass <sup>2</sup>	.....
1.2	Spare magnetic compass <sup>2</sup>	.....
1.3	Gyro-compass <sup>2</sup>	.....
1.4	Gyro-compass heading repeater <sup>2</sup>	.....
1.5	Gyro-compass bearing repeater <sup>2</sup>	.....
1.6	Heading or track control system <sup>2</sup>	.....
1.7	Pelorus or compass bearing device <sup>2</sup>	.....
1.8	Means of correcting heading and bearings	.....
1.9	Transmitting heading device (THD) <sup>2</sup>	.....
2.1	Nautical charts/Electronic chart display and information system (ECDIS) <sup>3</sup>	.....
2.2	Back-up arrangements for ECDIS	.....
2.3	Nautical publications	.....
2.4	Back-up arrangements for electronic nautical publications	.....
3.1	Receiver for a global navigation satellite system/terrestrial radionavigation system <sup>2, 3</sup>	.....
3.2	9 GHz radar <sup>2</sup>	.....
3.3	Second radar (3 GHz/9 GHz <sup>3</sup> ) <sup>2</sup>	.....
3.4	Automatic radar plotting aid (ARPA) <sup>2</sup>	.....
3.5	Automatic tracking aid <sup>2</sup>	.....
3.6	Second automatic tracking aid <sup>2</sup>	.....
3.7	Electronic plotting aid <sup>2</sup>	.....
4.1	Automatic identification system (AIS)	.....
4.2	Long-range identification and tracking system	.....
5.1	Voyage data recorder (VDR) <sup>3</sup>	.....
5.2	Simplified voyage data recorder (S-VDR) <sup>3</sup>	.....
6.1	Speed and distance measuring device (through the water) <sup>2</sup>	.....
6.2	Speed and distance measuring device (over the ground in the forward and athwartships direction) <sup>2</sup>	.....
7	Echo-sounding device <sup>2</sup>	.....

<sup>2</sup> Alternative means of meeting this requirement are permitted under regulation V/19. In case of other means they shall be specified.  
<sup>3</sup> Delete as appropriate.

5 **Details of navigational systems and equipment** (continued)

8.1	Rudder, propeller, thrust, pitch and operational mode indicator <sup>2</sup>	.....
8.2	Rate-of-turn indicator <sup>2</sup>	.....
9	Sound reception system <sup>2</sup>	.....
10	Telephone to emergency steering position <sup>2</sup>	.....
11	Daylight signalling lamp <sup>2</sup>	.....
12	Radar reflector <sup>2</sup>	.....
13	International Code of Signals	.....
14	IAMSAR Manual, Volume III	.....
15	Bridge navigational watch alarm system (BNWAS)	.....

**THIS IS TO CERTIFY** that this Record is correct in all respects.

Issued at .....

(Place of issue of the Record)

.....  
(Date of issue)

.....  
(Signature of duly authorized official issuing the Record)

(Seal or stamp of the issuing authority, as appropriate)

\*\*\*

<sup>2</sup> Alternative means of meeting this requirement are permitted under regulation V/19. In case of other means they shall be specified.

**RESOLUTION A.468(XII)**

*Adopted on 19 November 1981  
Agenda item 10(b)*

**CODE ON NOISE LEVELS ON BOARD SHIPS**

**A**

THE ASSEMBLY,

RECALLING Article 16(i) of the Convention on the Inter-Governmental Maritime Consultative Organization,

RECALLING ALSO resolution A.343(IX) by which it adopted the Recommendation on Methods of Measuring Noise Levels at Listening Posts,

NOTING that high noise levels on board ships could affect seafarers' health and impair the safety of the ship,

HAVING DECIDED to specify acceptable noise levels on board ships to safeguard seafarers' health and ensure the safe operation of the ship which would complement the review of resolution A.343(IX) aiming at limiting interference of shipborne noise with external audible navigational signals,

HAVING CONSIDERED the recommendation made by the Maritime Safety Committee at its forty-fourth session,

1. ADOPTS the Code on Noise Levels on Board Ships, the text of which is set out in the Annex to this resolution;
2. INVITES all Governments concerned:
  - (a) To take appropriate steps to implement the provisions of the Code as soon as possible;
  - (b) To inform IMCO of measures taken in this respect and of any experience gained from the application of the Code, together with any information requested by resolution A.343(IX).

**B**

THE ASSEMBLY,

HAVING ADOPTED the Code on Noise Levels on Board Ships,

RECOGNIZING this Code and the recommendations of resolution A.343(IX) as compatible and companion documents although based on different methods of sound measurements,

AUTHORIZES the Maritime Safety Committee to keep both the Code on Noise Levels on Board Ships and the Recommendation on Methods of Measuring Noise Levels at Listening Posts under review, so as to ensure that they reflect current experience gained from their application and other relevant international standards, and to consider the amalgamation of both documents.

ANNEX

CODE ON NOISE LEVELS ON BOARD SHIPS

**CONTENTS**

**PREAMBLE**

**CHAPTER 1 – GENERAL**

- 1.1 Scope
- 1.2 Purpose
- 1.3 Application
- 1.4 Definitions

**CHAPTER 2 – MEASUREMENT**

- 2.1 General
- 2.2 Operating conditions at sea
- 2.3 Operating conditions in port
- 2.4 Environmental conditions
- 2.5 Safe measurement conditions
- 2.6 Measurement procedures
- 2.7 Calibration
- 2.8 Measurement positions

**CHAPTER 3 – MEASURING EQUIPMENT**

- 3.1 Equipment specifications
- 3.2 Use of equipment

**CHAPTER 4 – MAXIMUM ACCEPTABLE SOUND PRESSURE LEVELS**

- 4.1 General
- 4.2 Noise level limits
- 4.3 Survey report

**CHAPTER 5 – NOISE EXPOSURE LIMITS**

- 5.1 General
- 5.2 Hearing conservation and use of ear protectors
- 5.3 Limits of exposure of seafarers to high noise levels
- 5.4 24 hour equivalent continuous sound level limit
- 5.5 Hearing conservation programme



**CHAPTER 6 – ACOUSTIC INSULATION BETWEEN ACCOMMODATION SPACES**

- 6.1 General
- 6.2 Sound insulation index
- 6.3 Erection of materials

**CHAPTER 7 – EAR PROTECTION AND WARNING INFORMATION**

- 7.1 General
- 7.2 Recommendation for ear protectors
- 7.3 Selection and use of ear protectors
- 7.4 Warning notices
- 7.5 Miscellaneous equipment

**APPENDIX 1    FORMAT FOR NOISE SURVEY REPORT**

**APPENDIX 2    INSTRUCTIONS TO SEAFARERS AND RESPONSIBILITY**

**APPENDIX 3    SUGGESTED METHODS OF CONTROLLING NOISE EXPOSURE**

## PREAMBLE

- 1 The Code on Noise Levels on Board Ship (hereinafter referred to as the Code) has been developed to provide guidance to Administrations on principles of noise control on board ships in general. Its purpose is to stimulate and promote noise control at a national level within the framework of internationally agreed guidelines.
- 2 Guidance to Administrations on maximum noise levels and noise exposure limits should be considered as the main objectives of the Code.
- 3 The recommendations on procedures and programmes should be regarded as an attempt to establish international uniformity rather than to set strict rules to be followed.
- 4 The Code has been developed having regard to conventional passenger and cargo ships. While certain types and sizes of ships have been excluded from application, it should be recognized that full application to ships which differ appreciably from the conventional types of ships regarding design or operations might need specific consideration.
- 5 The Code is not intended for direct incorporation by reference or reproduction in national legislation although it could provide a basis for such legislation.
- 6 The Organization adopted a recommendation on methods of measuring noise levels at listening posts with resolution A.343(IX). This recommendation related to interference by shipborne noise with the proper reception of external audible navigation signals and although the methods of measuring noise levels in accordance with resolution A.343(IX) and with the Code are different, these documents are considered compatible inasmuch as the Code is concerned primarily with the effect of noise on health and comfort.

## CHAPTER 1 – GENERAL

### 1.1 Scope

1.1.1 The Code is designed to provide standards to prevent the occurrence of potentially hazardous noise levels on board ships and to provide standards for an acceptable environment for seafarers.

1.1.2 Recommendations are made for :

- .1 protecting the seafarer from the risk of noise-induced hearing loss under conditions where at present it is not feasible to limit the noise to a level which is not potentially harmful;
- .2 measurement of noise levels and exposure;
- .3 limits on acceptable maximum noise levels for all spaces to which seafarers normally have access.

### 1.2 Purpose

1.2.1 The purpose of the Code is to limit noise levels and to reduce exposure to noise, in order to:

- .1 provide for safe working conditions by giving consideration to the need for speech communication and for hearing audible alarms, and to an environment where clear-headed decisions can be made in control stations, navigation and radio spaces and manned machinery spaces;
- .2 protect the seafarer from excessive noise levels which may give rise to a noise-induced hearing loss;
- .3 provide the seafarer with an acceptable degree of comfort in rest, recreation and other spaces and also provide conditions for recuperation from the effects of exposure to high noise levels.

### 1.3 Application

1.3.1 The Code applies to new ships of 1,600 tons gross tonnage and over.

1.3.2 The provisions relating to potentially hazardous noise levels contained in the Code should also apply to existing ships of 1,600 tons gross tonnage and over, as far as reasonable and practicable, to the satisfaction of the Administration.

1.3.3 The Code should apply to new ships of less than 1,600 tons gross tonnage, as far as reasonable and practicable, to the satisfaction of the Administration.

1.3.4 The Code does not apply to:

- dynamically supported craft;
- fishing vessels;
- pipe-laying barges;
- crane barges;
- mobile offshore drilling units;
- pleasure yachts not engaged in trade;
- ships of war and troopships;
- ships not propelled by mechanical means.

1.3.5 For ships designed for and employed on voyages of short duration, or on other services involving short periods of operation of the ship, sections 4.2.3 and 4.2.4 may be applied only with the ship in the port condition, provided that the periods under such conditions are adequate for seafarers' rest and recreation.

1.3.6 The Code applies to ships in service, i.e. in port or at sea with seafarers on board.

1.3.7 The Code is not intended to apply to passenger cabins and other passenger spaces except in so far as they are work spaces and are covered by the provisions of the Code.

#### 1.4 Definitions

For the purpose of the Code the following definitions apply. Additional definitions are given elsewhere in the Code.

1.4.1 **Accommodation spaces:** Cabins, offices (for carrying out ship's business), hospitals, mess rooms, recreation rooms (such as lounges, smoke rooms, cinemas, libraries and hobbies and games rooms) and open recreation areas to be used by seafarers.

1.4.2 **Auxiliary machinery:** Machinery other than main propelling machinery that is in service when the ship is in normal service, e.g. auxiliary diesel engines, turbo-generators, hydraulic motors and pumps, compressors, boiler ventilation fans, gear pumps.

1.4.3 **A-weighted sound pressure level or noise level:** The quantity measured by a sound level meter in which the frequency response is weighted according to the A-weighting curve (see IEC publication 651).

1.4.4 **Continuously manned spaces:** Spaces in which the continuous or prolonged presence of seafarers is necessary for normal operational periods.

1.4.5 **Crane barge:** A vessel with permanently installed cranes designed principally for lifting operations.

1.4.6 **Duty stations:** Those spaces in which the main navigating equipment, the ship's radio or the emergency source of power are located or where the fire recording or fire control equipment is centralized and also those spaces used for galleys, main pantries, stores (except isolated pantries and lockers), mail and specie rooms, workshops other than those forming part of the machinery spaces and similar such spaces.

1.4.7 **Dynamically supported craft:** A craft which is operable on or above water and which has characteristics different from those of conventional displacement ships. Within the aforementioned generality, a craft which complies with either of the following characteristics:

- .1 the weight, or a significant part thereof, is balanced in one mode of operation by other than hydrostatic forces;
- .2 the craft is able to operate at speeds such that the function  $\frac{v}{\sqrt{gL}}$  is equal to or greater than 0.9, where "v" is the maximum speed, "L" is the water-line length and "g" is the acceleration due to gravity, all in consistent units.

1.4.8 **Ear protector:** A device worn to reduce the level of noise heard by the wearer.

1.4.9 **Effective sound level  $L_{ef(X)}(H)$ :** A notional continuous sound level which is calculated from the various A-weighted sound levels and duration at these levels with an XdB exchange rate. The exchange rate is the number of dB decrease in noise level which would allow doubling of exposure time.  $L_{ef(3)}(H)$  is equal to  $L_{eq}(H)$ . In instances of fluctuating noise and intermittent exposures 5dB is often used for X. "H" represents the time period concerned expressed in hours.

1.4.10 **Equivalent continuous sound level  $L_{eq}(H)$ :** A notional level which would in the course of a given time period (H) cause the same A-weighted sound energy to be received as that due to the actual sound over the period. "H" represents the time period concerned expressed in hours.

$$L_{eq} = 10 \log_{10} \frac{1}{T} \int_0^T \frac{(p_a(t))^2}{p_0^2} .dt$$

where: T = measurement time

$p_a(t)$  = A-weighted instantaneous sound pressure

$p_0$  =  $20 \times 10^{-6}$  pascal (the reference level).

1.4.11 **Fishing vessel:** A vessel used commercially for catching fish, whales, seals, walrus or other living resources of the sea.

1.4.12 **Fluctuating noise:** Noise which is varying in level rising and falling. For the purpose of this Code it may be taken to mean fluctuations in excess of the steady noise as defined in 1.4.31 and excludes impulse noise as defined in 1.4.14.

1.4.13 **Hearing loss:** Hearing loss is evaluated in relation to a reference auditory threshold defined conventionally in ISO Standard 389 (1975). The hearing loss corresponds to the difference between the auditory threshold of the subject being examined and the reference auditory threshold. ISO Standard 1999 (1975)\* takes an average loss of 25 dB calculated at frequencies 500, 1,000 and 2,000 Hz.

1.4.14 **Impulse noise:** Noise of less than one second's duration which occurs as an isolated event, or as one of a series of events with a repetition rate of less than 15 times per second.

1.4.15 **Integrating sound level meter:** A sound level meter designed or adapted to measure the level of the mean squared time averaged A-weighted sound pressure.

1.4.16 **ISO noise rating (NR) number:** The number found by plotting the octave band spectrum on the NR curves given in ISO Standard R 1996-1967 and selecting the highest noise rating curve to which the spectrum is tangent.

1.4.17 **Machinery spaces:** All spaces containing propulsion machinery, boilers, oil fuel units, steam and internal combustion engines, generators and major electrical machinery, oil filling stations, refrigerating, stabilizing, ventilation and air-conditioning machinery and similar spaces, and trunks to such spaces.

1.4.18 **Mobile offshore drilling unit:** A vessel capable of engaging in drilling operations for the exploration for, or exploitation of, resources beneath the sea-bed, such as liquid or gaseous hydrocarbons, sulphur or salt.

1.4.19 **Navigating bridge wings:** Those parts of the ship's navigating bridge extending towards the ship's sides.

1.4.20 **Noise:** For the purpose of the Code all sound which can result in hearing impairment, or which can be harmful to health or be otherwise dangerous.

1.4.21 **Noise induced hearing loss:** A hearing loss, originating in the nerve cells within the cochlea, attributable to the effects of sound.

1.4.22 **Noise level:** See A-weighted sound pressure level (1.4.3).

1.4.23 **Normal service shaft speed:** The shaft speed specified for the ship's acceptance on initial delivery, or after being modified, as applicable.

1.4.24 **Occasional exposures:** Those exposures typically occurring once per week, or less frequently.

1.4.25 **Passenger:** Any person on board other than the master and members of the crew or other persons employed or engaged in any capacity on board a ship on the business of that ship.

1.4.26 **Pipe-laying barge:** A vessel specifically constructed for, or used in conjunction with, operations associated with the laying of submarine pipelines.

1.4.27 **Port condition:** The condition in which all machinery solely required for propulsion is stopped.

---

\* This Standard is at present (January 1981) being revised.

1.4.28 **Potentially hazardous noise levels:** Those levels at and above which persons exposed to them without protection are at risk of sustaining a noise induced hearing loss.

1.4.29 **Sound:** Energy that is transmitted by pressure waves in air or other materials and is the objective cause of the sensation of hearing.

1.4.30 **Sound pressure level:** A measure of sound level,  $L$ , on a logarithmic scale given by:

$$L = 20 \log_{10} \frac{(p)}{(p_0)} \text{ dB}$$

where:  $p$  = rms value of measured sound pressure between 20 Hz and 20 kHz

$p_0 = 20 \times 10^{-6}$  pascal (the reference level).

1.4.31 **Steady noise:** A sound where the level fluctuates through a total range of less than 5 dB(A) as measured on the "slow" response of a sound level meter in one minute.

1.4.32 **Voyages of short duration:** Voyages where the ship is not generally underway for periods long enough for seafarers to require sleep, or long off-duty periods, during the voyages.

## CHAPTER 2 – MEASUREMENT

### 2.1 General

On completion of the construction of the ship, or as soon as practicable thereafter, measurement of noise levels in all spaces specified in Chapter 4 should take place under the operating conditions specified in 2.2 and 2.3 and should be suitably recorded as required by 4.3.

### 2.2 Operating conditions at sea

2.2.1 Measurements should be taken with the ship in the loaded or ballast condition.

2.2.2 The main propulsion machinery should be run at normal design service shaft speed. Controllable pitch and Voith-Schneider propellers, if any, should be in the normal seagoing position.

2.2.3 All auxiliary machinery, navigation instruments, radio and radar sets, etc., normally, or likely to be, in use at any one time should operate throughout the measurement period.

2.2.4 Measurements in spaces containing emergency diesel engine-driven generators, fire pumps or other emergency equipment that would normally be run only in emergency, or for test purposes, should be taken with the equipment operating. Adjoining spaces need not be measured with such equipment operating, however, unless it is likely that the equipment will be operated for periods other than those mentioned above.

2.2.5 Mechanical ventilation and air-conditioning equipment should be in normal operation, taking into account that the capacity should be in accordance with the design conditions.

2.2.6 Doors and windows should in general be closed but they should be open in spaces where this is the normal condition, for instance in the navigating bridge where the door on the lee side is normally open.

2.2.7 Spaces should be furnished with all necessary equipment. Measurements without soft furnishings may be made but no allowance should be made for their absence.

2.2.8 Ships fitted with bow thrusters, stabilizers, etc., may be subject to high noise levels when in operation. Measurements should be taken at positions around such machinery when in operation and in adjacent accommodation spaces and duty stations.

### **2.3 Operating conditions in port**

2.3.1 Measurements as specified in 2.3.2, 2.3.3 and 2.3.4 should be taken with the ship in port condition.

2.3.2 Measurements should be taken with the ship's cargo handling equipment in operation, in those areas and accommodation spaces affected by its operation. Noise originating from sources external to the ship should be discounted as indicated in 2.4.3.

2.3.3 Where the ship is a vehicle carrier and noise during loading and discharging originates from vehicles, the noise level in the cargo spaces and the duration of the exposure should be measured. This exposure should be considered in conjunction with Chapter 5.

2.3.4 It will be necessary to take measurements in machinery spaces with the auxiliary machinery operating in the port condition if the provisions of 5.3.1 in respect of ear protection are to be met in lieu of the provisions of 4.2.1.1 during maintenance, overhaul or similar port conditions.

### **2.4 Environmental conditions**

2.4.1 The depth of water under the ship's keel and the presence of large reflecting surfaces in the ship's vicinity may affect the readings obtained, and should, therefore, be noted in the noise survey report.

2.4.2 The meteorological conditions such as wind and rain, as well as sea state, should be such that they do not influence the measurements. Wind force 4 and sea state 3 should not be exceeded. If this cannot be achieved, the actual conditions should be reported.



2.4.3 Care should be taken to see that noise from extraneous sound sources, such as people, construction and repair work, does not influence the noise level on board the ship at the positions of measurement. If necessary, readings may be corrected for steady state background noise according to the energy summation principle.

## 2.5 Safe measurement conditions

With the meter set to "fast response" spot checks should be made at positions of high noise level to ensure the safety of a person taking measurements.

## 2.6 Measurement procedures

2.6.1 During noise level measurement, only seafarers necessary for the operation of the ship and persons taking the measurements should be present in the space concerned.

2.6.2 Sound pressure level readings should be taken in decibels using an A-weighting filter (dB(A)) and if necessary also in octave bands between 31.5 and 8,000 Hz, in order to determine the ISO noise rating (NR) number, as required by Chapter 4.

2.6.3 The meter should be set to "slow" response and the readings made only to the nearest decibel. A measuring time of at least 5 seconds should be allowed. If a meter fluctuates in level within a range of no more than 5 dB(A) maximum to minimum, an estimate of the level should be made by averaging the excursions of the needle by eye.

2.6.4 If the range fluctuations are in excess of 5 dB(A), or the sound is cyclic, irregular or intermittent in operation an integrating meter should be used set to A-weighting. Integration should be made over a period of at least 30 seconds.

### 2.6.5 *Exposure measurement*

In addition to the steady state and fluctuating noise level measurements, the noise exposure of seafarers may be measured as allowed by 4.1.2, if necessary.

## 2.7 Calibration

The sound level meter should be calibrated with the calibrator referred to in 3.2.2 before and after measurements are taken.

## 2.8 Measurement positions

### 2.8.1 *Points of measurement*

If not otherwise stated, measurements should be performed with the microphone at a height of between 1.2 m and 1.6 m from the deck. The distance between two measurement points should be at least 2 m, and in large spaces not containing machinery, measurements should be taken at intervals not greater than 7 m throughout the space including positions of maximum noise level. In large cargo holds no more than three measurements need be taken. In no case should measurements be taken closer than 0.5 m from the boundaries of a space. The microphone positions should be as specified in 2.8.2 to 2.8.8.

### 2.8.2 *Accommodation spaces*

One measurement should be made in the middle of the space. The microphone should be moved slowly horizontally and/or vertically over a distance of 1 m and the mean reading recorded. Additional measurements should be performed at other points if appreciable differences, i.e. greater than 10 dB(A), in the level of sound inside the room occur, especially near the head positions of a sitting or lying person.

### 2.8.3 *Machinery spaces*

2.8.3.1 Measurements should be made at the principal working and control stations of the seafarers in the machinery spaces and in the adjacent control rooms, if any, special attention being paid to telephone locations and to positions where voice communication and audible signals are important.

2.8.3.2 Readings should not normally be taken closer than 1 m from operating machinery, or from decks, bulkheads or other large surfaces, or from air inlets. Where this is not possible, measurement should be taken at a position midway between the machinery and adjacent reflecting surface.

2.8.3.3 Measurements from machinery which constitutes a sound source should be taken at 1 m from the machinery. Measurement should be made at a height of 1.2 m to 1.6 m above the deck, platform or walkway as follows:

- .1 at a distance of 1 m from, and at intervals not greater than 3 m around, all sources such as:
  - main turbines or engines at each level
  - main gearing
  - turbo-blowers
  - purifiers
  - electrical alternators and generators
  - boiler firing platform
  - forced and/or induced draught fans
  - compressors
  - cargo pumps (including their driving motors or turbines)

(In order to avoid an unnecessarily large and impractical number of measurements and recordings in the case of large engines and of machinery spaces where the measured sound pressure level in dB(A) at the intervals above does not vary significantly, it will not be necessary to record each position. Full measurement at representative positions and at the positions of maximum sound pressure level should, however, be made and recorded, subject to at least four measurements being recorded at each level.);

- .2 at local control stations, e.g. the main manoeuvring or emergency manoeuvring stand on the main engine and the machinery control rooms;

- .3 at all other locations not specified in .1 and .2 which would normally be visited during routine inspection, adjustment and maintenance;
- .4 at points on all normally used access routes, unless covered by positions already specified above, at intervals not greater than 10 m;
- .5 in rooms within the machinery space, e.g. workshops.

(In order to restrict the number of measurements and recordings, the number of recordings can be reduced as in .1, subject to a total of at least four measurements (including those specified in this paragraph) being recorded at each machinery space level up to upper deck.)

#### **2.8.4 Duty stations**

The noise level should be measured at all points where the work is carried out. Additional measurements should be performed in spaces containing duty stations if variations in noise level are thought to occur in the vicinity of the duty stations.

#### **2.8.5 Normally unoccupied spaces**

2.8.5.1 In addition to the spaces referred to in 2.8.2 to 2.8.4, measurements should be made in all locations with unusually high noise levels where seafarers may be exposed, even for relatively short periods, and at intermittently used machinery locations, for example cargo discharge pumps.

2.8.5.2 In order to restrict the number of measurements and recordings, noise levels need not be measured for normally unoccupied spaces, holds, deck areas and other spaces which are remote from sources of noise and where a preliminary survey shows that the noise levels are well below the limit specified in Chapter 4.

#### **2.8.6 Open deck**

Measurements should be taken in any areas provided for the purpose of recreation and additionally where a preliminary survey indicates that the limits specified in 5.3.1 may be exceeded.

#### **2.8.7 Intake and exhaust openings**

When measuring noise levels at the intake and exhaust of engines and near ventilation, air-conditioning and cooler systems, the microphone should, where possible, be placed outside the gas stream at a distance of 1 m from the edge of the intake or exhaust opening and at a 30° angle away from the direction of the gas stream and as far as possible from reflecting surfaces.

#### **2.8.8 Navigating bridge wings**

Measurements should be taken on both navigating bridge wings but should only be taken when the navigating bridge wing to be measured is on the lee side of the ship.

## CHAPTER 3 – MEASURING EQUIPMENT

### 3.1 Equipment specifications

#### 3.1.1 *Sound level meters*

Measurement of sound pressure levels should be carried out using precision grade sound level meters, industrial grade sound level meters, and integrating sound level meters subject to the requirements of paragraph 3.1.4. Such meters should be manufactured to the IEC Publication 651(1979)\* type 0, 1 or 2 standards as applicable, or to an equivalent standard acceptable to the Administration.

#### 3.1.2 *Octave filter set*

When used alone, or in conjunction with a sound level meter, as appropriate, an octave filter set should conform to IEC Publication 225(1966)\*\* or an equivalent standard acceptable to the Administration.

#### 3.1.3 *Measurement microphones*

Microphones should be of the random incidence type and should meet the standards of IEC Publication 179(1973), IEC Publication 651(1979) types I and II or an equivalent standard acceptable to the Administration.

#### 3.1.4 *Selection of equipment*

The main difference between the grades is in the tolerance band which is allowed on the A-weighting filter networks. The tolerances allowed are wider at low and high frequencies than at mid-frequencies. In consequence, for sound emitted by typical medium sized machines the accuracy of measurement with a precision grade meter is about  $\pm 1$  dB(A) and with an industrial grade meter about  $\pm 3$  dB(A). The industrial grade meter will tend to give lower readings than the precision grade. It is recommended that where noise levels are likely to be close to the limits given in the Code precision grade instruments should be used, and in any cases of dispute readings should be taken with a precision grade instrument.

### 3.2 Use of equipment

#### 3.2.1 *Measuring fluctuating noise*

When measuring fluctuating noise an integrating sound level meter should be used.

#### 3.2.2 *Calibration*

A suitable calibrator, approved by the manufacturer of the particular sound level meter, should be used. Calibrators for use with precision grade sound level meters should be accurate to within  $\pm 0.3$  dB(A), and for use with industrial grade meters accurate to within  $\pm 0.5$  dB(A).

---

\* Recommendation for sound level meters.

\*\* Octave, half octave and third octave band-pass filters intended for the analysis of sounds and vibrations.

### 3.2.3 *Check of measuring instrument and calibrator*

The sound level measuring instrument and calibrator should be returned to the manufacturer or other competent organization capable of providing a calibration check traceable to a national standard laboratory at intervals not exceeding two years.

### 3.2.4 *Microphone wind screen*

A microphone wind screen should be used when taking readings outside, e.g. on navigating bridge wings or on deck, and below deck where there is any substantial air movement. The wind screen should not affect the measurement level of similar sounds by more than 0.5 dB(A) in "no wind" conditions.

### 3.2.5 *Measuring equipment for use in gas dangerous spaces*

Measuring equipment should not be used in areas where flammable gas/air mixtures may be present, unless such equipment has been certified intrinsically safe for such purposes.

### 3.2.6 *Industrial grade instruments*

In any situations where an industrial grade meter is used a factor of 3 dB(A) should be added to the readings to allow for the reduced accuracy of this type of instrument.

## CHAPTER 4 – MAXIMUM ACCEPTABLE SOUND PRESSURE LEVELS

### 4.1 General

4.1.1 The limits specified in this section should be regarded as maximum levels and not as desirable levels. Where reasonably practicable, it is desirable for the noise level to be lower than the maximum levels specified.

4.1.2 The limit specified for any work space may be assessed by steady, fluctuating, equivalent continuous or effective sound level measurement for the space. Where the equivalent continuous or effective sound level is used, it should include all the measurement locations required in Chapter 2. Where the 24 hour equivalent continuous or effective sound level is used as the basis for compliance with the Code, the limit for this level given in Chapter 5 should apply.

4.1.3 Personnel entering spaces with noise levels greater than 85 dB(A) should be required to wear ear protectors (see Chapter 5). The limit of 110 dB(A) given in 4.2.1.2 assumes that ear protectors giving protection meeting the requirements for ear muffs in Chapter 7 are worn.

4.1.4 Limits are specified in terms of A-weighted sound pressure levels (see 1.4.3 and 1.4.22).

4.1.5 In accommodation spaces where the dB(A) limits are exceeded and where there is a subjectively annoying low frequency sound or obvious tonal components the ISO noise rating (NR) number should also be determined. The limits specified may be considered as satisfied if the ISO noise rating (NR) number does not numerically exceed the specified A-weighted value minus 5.

4.1.6 In machinery spaces specified in 4.2.1.2, in which the operation of any equipment or machinery or part of machinery results in an emission of subjectively high frequency sound and in which the sound level of 105 dB(A) is exceeded, the ISO noise rating (NR) number should be determined. When NR 105 is exceeded the acceptability of this level should be determined by the Administration.

## 4.2 Noise level limits

Limits for noise levels are specified for various spaces as follows:

<b>4.2.1</b>	<b><i>Work spaces</i></b> (see 5.1)	<b><i>dB(A)</i></b>
.1	Machinery spaces (continuously manned)**	90
.2	Machinery spaces (not continuously manned)**	110
.3	Machinery control rooms	75
.4	Workshops	85
.5	Non-specified work spaces**	90
<b>4.2.2</b>	<b><i>Navigation spaces</i></b>	<b><i>dB(A)</i></b>
.1	Navigating bridge and chartrooms	65
.2	Listening post, including navigating bridge* wings and windows	70
.3	Radio rooms (with radio equipment operating but not producing audio signals)	60
.4	Radar rooms	65
<b>4.2.3</b>	<b><i>Accommodation spaces</i></b>	<b><i>dB(A)</i></b>
.1	Cabins and hospitals	60
.2	Mess rooms	65
.3	Recreation rooms	65
.4	Open recreation areas	75
.5	Offices	65

\* Reference is made to resolution A.343(IX) which also applies.

\*\* Ear protectors should be worn when the noise level is above 85 dB(A) (see 4.1.3).

<b>4.2.4 Service spaces</b>	<b><i>dB(A)</i></b>
.1 Galleys, without food processing equipment operating	75
.2 Serveries and pantries	75
<b>4.2.5 Normally unoccupied spaces*</b>	<b><i>dB(A)</i></b>
Spaces not specified (see 5.1)	90

### 4.3 Survey report

4.3.1 A noise survey report should be made for each ship. The report should comprise information on the noise levels in the various spaces on board. The report should show the reading at each specified measuring point. The points should be marked on a general arrangement plan, or on accommodation drawings attached to the report, or should otherwise be identified.

4.3.2 A model format for noise survey reports is set out in Appendix 1.

4.3.3 The following particulars should be mentioned in the noise survey report:

- .1 Hull number, name, gross tonnage, main dimensions and type of ship.
- .2 The leading particulars of the ship's machinery.
- .3 Names of the builder and owner of the ship.
- .4 Date and time of the measurements.
- .5 The type of voyage, the meteorological conditions, sea state and the ship's position during the measurements.
- .6 The underkeel clearance during the measurements.
- .7 The main operating conditions as required by 2.2 and 2.3, including those items on the main machinery line which were operating and the operating condition.
- .8 The name and address of those carrying out the measurements.
- .9 The make, type and serial number of instrumentation used.
- .10 Details and date of calibration of instruments.
- .11 A list of the main noise abatement measures applied aboard the ship.
- .12 Other particulars of interest, including exceptions to the standard laid down in this Code.

4.3.4 Where the ship does not comply with Chapter 4 and where the use of ear protectors is required, a copy of the noise survey report should be carried on board.

---

\* Ear protectors should be worn when the noise level is above 85 dB(A) (see 4.1.3).

## CHAPTER 5 – NOISE EXPOSURE LIMITS

### 5.1 General

The noise level limits as set out in Chapter 4 are designed to ensure that, if they are complied with, seafarers will not be exposed to an  $L_{eq}(24)$  exceeding 80 dB(A), i.e. within each day or 24 hour period the equivalent continuous noise exposure would not exceed 80 dB(A). In spaces with sound pressure levels exceeding 85 dB(A), it will be necessary to use suitable ear protection, or to apply time limits for exposure, as set out in this section, to ensure that an equivalent level of protection is maintained. Consideration should be given to the instruction of seafarers on these aspects, as recorded in Appendix 2.

### 5.2 Hearing conservation and use of ear protectors

In order to comply with the exposure criteria of this section, the use of ear protectors complying with Chapter 7 is permitted. In some instances when ear protectors are required for compliance with the Code, a hearing conservation programme and other measures may be implemented by the Administration.

### 5.3 Limits of exposure of seafarers to high noise levels

Seafarers should not be exposed to noise in excess of the levels and durations shown in figure 5.1 and described in 5.3.1 to 5.3.5.

#### 5.3.1 *Maximum exposure without protection (zone E, fig.5.1)*

For exposures of less than 8 hours, seafarers without ear protection should not be exposed to noise levels exceeding 85 dB(A). When seafarers remain for more than 8 hours in spaces with a high noise level, an  $L_{eq}(24)$  of 80 dB(A) should not be exceeded. Consequently, for at least a third of each 24 hours each seafarer should be subject to an environment with a noise level not exceeding 75 dB(A).

#### 5.3.2 *Maximum exposure with protection (zone A, fig.5.1)*

No seafarer even wearing ear protectors should be exposed to levels exceeding 120 dB(A) or to an  $L_{eq}(24)$  exceeding 105 dB(A).

#### 5.3.3 *Daily exposure (zone D, fig.5.1)*

If seafarers routinely work (daily exposure) in spaces with noise levels within zone D ear protectors should be worn and a hearing conservation programme may be considered.

#### 5.3.4 *Occasional exposure (zone B, fig.5.1)*

Only occasional exposures should be allowed in zone B and both ear muffs and ear plugs should be used unless the exposure duration is restricted to not more than 10 minutes when only ear muffs or plugs are required.

#### 5.3.5 *Occasional exposure (zone C, fig.5.1)*

In zone C only occasional exposures should be allowed and ear muffs or plugs should be required.



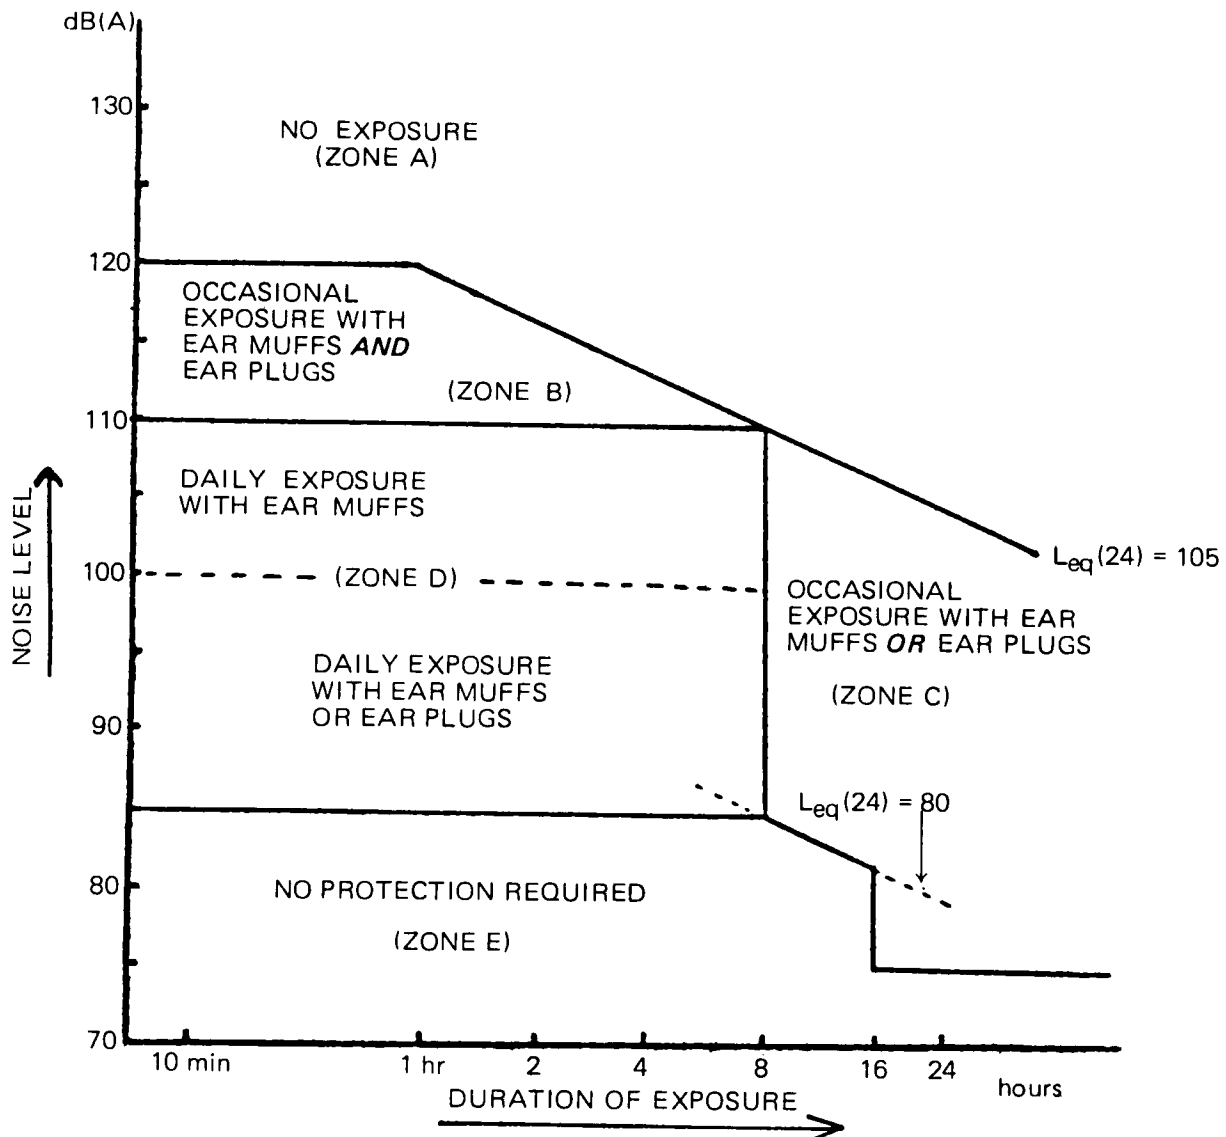


Fig. 5.1 Allowable daily and occasional noise exposure zones

#### 5.4 24 hour equivalent continuous sound level limit

As an alternative to compliance with the provisions of 5.3 (fig. 5.1), no unprotected seafarer should be exposed to a 24 hour equivalent continuous sound level greater than 80 dB(A). Each individual's daily exposure duration in spaces requiring the use of ear protectors should not exceed 4 hours continuously or 8 hours in total. In those cases, where the Administration determines that exposures are intermittent, no unprotected seafarer should be exposed to an equivalent effective sound level which in the case of a 5 dB exchange rate would be  $L_{ef(5)}(24)$  equal to 77 dB(A).

#### 5.5 Hearing conservation programme

5.5.1 A hearing conservation programme may be provided for seafarers exposed to the noise levels referred to in 5.3.3 in order to train them in the hazards of noise and use of ear protection, and to monitor hearing acuity. Some elements of a hearing conservation programme are as follows:

- .1 Initial and periodic audiometric tests administered by a trained and appropriately qualified person, to the satisfaction of the Administration.
- .2 Instruction of exposed persons on the hazards of high and long duration noise exposures and on the proper use of ear protectors (see Appendix 2).
- .3 Maintenance of audiometric test records.
- .4 Periodic analysis of records and hearing acuity of individuals with high hearing loss.

An optional element of a hearing conservation programme is to control the 24 hour equivalent continuous or effective sound level to which individuals working in high noise level spaces are exposed. Such control requires calculation of the 24 hour equivalent continuous or effective sound level based upon the measurement of exposure durations for steady noise levels in accordance with 2.6.5 or the equivalent continuous sound level measurement for fluctuating noise in accordance with 2.6.4. If this 24 hour level does not meet the limits, the duration of exposure should be controlled or ear protectors used at appropriate times to bring the individual's exposure within the limit.

## **CHAPTER 6 – ACOUSTIC INSULATION BETWEEN ACCOMMODATION SPACES**

### **6.1 General**

Consideration should be given to the acoustic insulation between accommodation spaces in order to make rest and recreation possible even if activities are going on in adjacent spaces, e.g. music, talking, cargo-handling, etc.

### **6.2 Sound insulation index**

6.2.1 The airborne sound insulation properties for bulkheads and decks within the accommodation should comply at least with the following airborne sound insulation index ( $I_a$ ) according to ISO Standard R717\*:

Cabin to cabin	$I_a = 30$
Messrooms, recreation rooms to cabins and hospitals	$I_a = 45$

6.2.2 The airborne sound insulation properties should be determined by laboratory tests in accordance with ISO Standard R140 Pt III\*\*, to the satisfaction of the Administration.

### **6.3 Erection of materials**

Care should be taken in the erection of materials and in the construction of accommodation spaces to ensure to the greatest practicable extent that the attenuation values specified in 6.2 are not significantly impaired.

\* ISO Standard R717 – Rating of Sound Insulation for Dwellings.

\*\* ISO Standard R140 Pt III – Laboratory Measurements of Airborne Sound Insulation and of Building Elements.

## CHAPTER 7 – EAR PROTECTION AND WARNING INFORMATION

### 7.1 General

When the application of means for controlling sound at source does not reduce the noise level in any space to that specified in 4.1.3, seafarers who are required to enter such spaces should be supplied with effective ear protection on an individual basis. The provision of ear protectors should not be considered to be a substitute for effective noise control. Appendix 3 summarizes current noise abatement methods which may be applied on new ships.

### 7.2 Recommendation for ear protectors

7.2.1 Ear protectors should provide at least the attenuation listed in table 7.1. The attenuation to be compared with that in the table should be the result of the average value of the ear protector attenuation minus the standard deviation measured in accordance with ISO Standard (DIS 4869) or similar standard acceptable to the Administration.

7.2.2 For the purpose of developing the criteria specified in Chapter 4 and section 5.3, ear protectors have been assumed to provide approximately the following insertion loss:

- .1 ear plugs – 20 dB(A)
- .2 ear muffs – 30 dB(A)
- .3 ear plugs and ear muffs – 35 dB(A)

Therefore, care should be exercised when using ear plugs in very high noise areas (i.e. over 100 dB(A)) unless the attenuation of the plug used sufficiently exceeds the values of table 7.1 or appropriate attenuations at individual frequencies are known.

TABLE 7.1 – REAL EAR ATTENUATION OF EAR PROTECTORS – dB

Type of ear protector	Octave band centre frequency – Hz							
	125	250	500	1000	2000	3150	4000	6300
Ear plugs	0	5	10	15	22	22	22	22
Ear muffs	5	12	20	30	30	30	30	30

### 7.3 Selection and use of ear protectors

Seafarers should be instructed in the proper use of ear protectors in accordance with Appendix 2.

## 7.4 Warning notices

Where the noise level in machinery spaces (or other spaces) is greater than 85 dB(A), entrances to such spaces should carry a warning notice comprising symbol and supplementary sign as prescribed by the Administration. If only a minor portion of the space has such noise levels the particular location(s) or equipment should be identified at eye level, visible from each direction of access.

## 7.5 Miscellaneous equipment

Where hand tools, galley and other portable equipment produce noise levels above 85 dB(A) in normal working conditions warning information should be provided.

### APPENDIX 1

#### FORMAT FOR NOISE SURVEY REPORT

#### 1 Ship particulars

- .1 Name of ship
- .2 Port of registry
- .3 Name and address of shipowner, managing owner or agent
- .4 Name and address of shipbuilder
- .5 Place of build
- .6 Builder's number
- .7 Gross tonnage
- .8 Type of ship
- .9 Ship's dimensions — length  
breadth  
depth  
maximum draught (summer load line)
- .10 Displacement at maximum draught
- .11 Date of keel laying
- .12 Date of delivery

#### 2 Machinery particulars

- .1 Propulsion machinery

Manufacturer:	Type:	Number of units:
Maximum cont. rating — power		kW
Normal designed service shaft speed:		r.p.m.
Normal service rating — power:		kW

## .2 Auxiliary diesel engines

Manufacturer:                      Type:  
 Output:                      kW                      Number of units:

## .3 Main reduction gear:

## .4 Type of propeller (fixed propeller, controllable pitch propeller, Voith-Schneider propeller)

Number of propellers:                      Number of blades:  
 Designed propeller shaft speed:                      r.p.m.

**3 Measuring instrumentation**

- | .1 Instrumentation | <i>Make</i> | <i>Type</i> | <i>Serial No.</i> |
|--------------------|-------------|-------------|-------------------|
| Sound level meter  |             |             |                   |
| Microphone         |             |             |                   |
| Filter             |             |             |                   |
| Windscreen         |             |             |                   |
| Calibrator         |             |             |                   |
| Other equipment    |             |             |                   |
- 
- | .2 Calibration of sound level meter<br>– at survey by competent authority | <i>Date</i> | <i>Calibration</i> | <i>Start</i> | <i>Finish</i> |
|---|-------------|--------------------|--------------|---------------|
|   |             |                    |              |               |

**4 Conditions during measurement**

- .1 Date of measurement:                      Starting time:                      Completion time:
- .2 Vessel's position during measurement
- .3 Type of voyage
- .4 Conditions during measurement
- Draught forward
  - Draught aft
  - Depth of water under keel
- .5 Weather conditions
- Wind force
  - Sea state
- .6 Ship speed
- .7 Actual propeller shaft speed:                      r.p.m.

**Note:** Those spaces and areas where noise rating numbers are calculated are indicated by \* and the data will be found in the Attachment.

- .8 Propeller pitch:
- .9 Propulsion machinery speed: r.p.m.
- .10 Propulsion machinery power: kW
- .11 Number of propulsion machinery units operating:
- .12 Number of diesel auxiliary engines operating:
- .13 Number of turbogenerators operating:
- .14 Other auxiliary equipment operating:

5 Measuring data

*Noise limits  
dB(A)*

*Measured sound  
pressure levels  
dB(A)*

*Machinery spaces:*

Control rooms

Workshops

Propulsion machinery:

Turbocharger

Top propulsion machinery

Auxiliary diesel engines/  
Turbogenerators

Reduction gear

Non-specified workspaces

*Accommodation and other spaces*

Messes

Recreation rooms

Offices

Galleys

Serveries and pantries

Cabins

---

**Note:** Those spaces and areas where noise rating numbers are calculated are indicated by \* and the data will be found in the Attachment.



APPENDIX 2

INSTRUCTIONS TO SEAFARERS AND RESPONSIBILITY

**1 Instruction to seafarers**

1.1 Seafarers should be instructed in the hazards of high and long duration noise exposures and the risk of noise induced hearing loss. Instruction should be given to all seafarers on initial employment and periodically thereafter to those regularly working in spaces with noise levels in excess of 85 dB(A). Instruction in the provisions of the Code should include:

- .1 noise exposure limits of Chapter 5 and the use of warning notices in complying with the criteria;
- .2 the types of ear protectors provided, their approximate attenuation and their proper use, fitting, and risk effects experienced when first wearing such protection;
- .3 any hearing conservation programme which may be available if working in spaces covered by warning notices;
- .4 some of the possible signs of hearing loss such as ringing in the ear, dead ear, or fullness in the ear.

1.2 Appropriate seafarers should receive such instruction as is necessary in the correct use and maintenance of machinery and silencers or attenuators in order to avoid the production of unnecessary noise.

**2 Responsibility of shipowners**

2.1 The shipowner should be responsible for ensuring that means for noise reduction and control are applied and maintained such that the requirements of the Code are met.

2.2 Where noise levels in any space exceed the limit of 85 dB(A), shipowners should ensure that:

- .1 the space is identified and the warning notice described in 7.4 of the Code is displayed;
- .2 the master and senior officers of the ship are notified as to the importance of controlling entry into the space and the importance of the use of suitable ear protectors;
- .3 suitable ear protectors are provided in sufficient numbers for distribution on an individual basis;
- .4 an instruction is issued to the master, senior officers and any safety officer of the ship pointing out the desirability of providing the instruction outlined in 1.1 and 1.2 to seafarers.



### 3 Responsibility of seafarers

3.1 Seafarers should be responsible for ensuring that:

- .1 measures adopted for noise control are used;
- .2 defective noise control equipment is reported to a responsible person;
- .3 suitable ear protectors are normally worn when entering areas in which their use is required by warning notices and that these protectors are not removed, even for short periods; and
- .4 ear protectors provided for use are not damaged or misused and are maintained in a clean condition.

## APPENDIX 3

### SUGGESTED METHODS OF CONTROLLING NOISE EXPOSURE

#### 1 General

1.1 In order to obtain a noise reduction on board ships to comply with the recommended limits given in Chapters 4 and 5 of the Code careful consideration should be given to means of such reduction. This Appendix is intended to provide guidance for the design of a ship in this respect.

1.2 Design and construction of noise control measures should be supervised by persons skilled in noise control techniques.

1.3 Some of the measures which can be taken to control the noise level or reduce the exposure of seafarers to potentially harmful noise are indicated in sections 2 to 10 of this Appendix. It is emphasized that it will not be necessary to implement all or any of the measures recommended in this Appendix on all ships. This Code does not provide detailed technical information needed for putting constructional noise control measures into effect, or for deciding which measures are appropriate in particular circumstances.

1.4 In applying noise control measures, care should be taken to ensure that rules and regulations concerning ship structure, accommodation and other safety matters are not infringed and the use of sound reduction materials should not introduce fire or health hazards.

1.5 The need for noise control should be taken into account at the design stage when deciding which of different designs of engines and machinery are to be installed, the method of installation and the siting of machinery in relation to other spaces, and the acoustic insulation and siting of the accommodation spaces.

1.6 Due to the normal method of ship construction it is most probable that noise originating from machinery and propellers reaching the accommodation and other spaces outside the machinery spaces will be of the structure-borne type.

1.7 When designing efficient and economic measures for noise control of machinery installations in existing ships, the measurement of sound produced in terms of A-weighted sound level may need to be supplemented by some form of frequency analysis.

## **2 Isolation of sources of noise**

2.1 Where practicable any engines or machinery producing noise levels in excess of the limits set out in 4.2 of the Code should be installed in compartments which do not require continuous attendance (see also 6.1 of this Appendix).

2.2 Accommodation should be sited both horizontally and vertically as far away as is practicable from sources of noise such as propellers and propulsion machinery.

2.3 Machinery casings should, where practicable, be arranged outside superstructures and deckhouses containing accommodation spaces. Where this is not feasible, passageways should be arranged between the casings and accommodation spaces, if practicable.

2.4 Consideration should be given, where practicable, to the placing of accommodation spaces in deck houses not in superstructures extending to the ship's side.

2.5 Consideration may also be given where applicable to the separation of accommodation spaces from machinery spaces by unoccupied spaces, sanitary and washing rooms.

2.6 Suitable partitions, bulkheads, decks, etc. may be needed to prevent the spread of sound. It is important that these be of the correct construction and location in relation to the source of sound and the frequency of the sound to be attenuated.

2.7 Where a space, such as a machinery space, is being divided into noisy (not continually manned) and less noisy (capable of being continually manned) spaces, it is preferable to have complete separation\*.

2.8 It may be advisable to provide sound absorbing material in certain spaces in order to prevent increase of noise level due to reflection from partitions, bulkheads, decks, etc.

## **3 Exhaust and intake silencing**

3.1 Exhaust systems from internal combustion engines, air intake systems to machinery spaces, accommodation spaces and other spaces should be so arranged that the inflow or discharge orifices are remote from places frequented by seafarers.

3.2 Silencers or attenuators should be fitted when necessary.

3.3 To minimize accommodation noise levels it is normally necessary to isolate exhaust systems and certain pipework and ductwork from casings, bulkheads, etc.

---

\* In these cases it may be necessary to ensure the supervision of the plant by installing alarms in the less noisy compartments and to arrange means of escape so that seafarers may leave these compartments without danger.

## **4 Machinery enclosure**

4.1 In continuously manned spaces or spaces where seafarers might reasonably be expected to spend lengthy periods of time on maintenance or overhaul work, and where separation as detailed in section 2 of this Appendix is not practicable, consideration may have to be given to the fitting of sound insulating enclosures or partial enclosures to engines or machinery producing sound pressure levels in excess of the limits set out in 4.2 of the Code.

4.2 Where the noise level produced by engines or machinery installed in spaces as in 4.1 above falls within the criteria of 5.3.1 of the Code and zone A of figure 5.1, it is essential that noise reduction measures are provided.

4.3 When sound insulating enclosures are fitted, it is important that they entirely enclose the noise source.

## **5 Reduction of noise in the aft body**

To reduce the noise influence in the aft body of the ship, especially to the accommodation spaces, consideration may be given to noise emission problems during the design procedures relating to the aft body, propeller, etc.

## **6 Enclosure of the operator**

6.1 In most machinery spaces it would be desirable and advisable to protect operating or watchkeeping seafarers by providing a sound reducing control room or other similar space (see 2.1 of this Appendix).

6.2 In continuously manned machinery spaces of small ships and of existing ships where noise levels are in excess of 85 dB(A), it would be desirable to provide a noise refuge at the control station or manoeuvring platform where the watchkeeper might be expected to spend the major part of the time.

## **7 Controls in accommodation spaces**

7.1 To reduce noise levels in accommodation spaces it may be necessary to consider the isolation of deckhouses containing such spaces from the remaining structure of the ship by resilient mountings.

7.2 Consideration may also be given to the provision of flexible connexions to bulkheads, linings and ceilings and the installation of floating floors within accommodation spaces.

7.3 The provision of curtains to sidescuttles and windows and the use of carpets within accommodation spaces assists in absorbing noise.

## **8 Selection of machinery**

8.1 The sound produced by each item of machinery to be fitted should be taken into account at the design stage. It may be possible to control noise by using a machine producing less airborne, fluid-borne or structure-borne sound.

8.2 Manufacturers should be requested to supply information on the sound produced by their machinery and also to provide recommended methods of installation in order to keep noise levels to a minimum.

## **9 Inspection and maintenance**

All items of machinery, equipment and associated working spaces should be regularly inspected with respect to noise by a competent person. Should such inspection reveal defects in the means for noise control, or other defects causing excessive noise, these should be rectified as soon as practicable.

## **10 Vibration isolation**

10.1 Where necessary, machines should be supported on correctly designed and fitted resilient mountings.

10.2 Where structure-borne sound from auxiliary machinery, compressors, hydraulic units, generating sets, vents, exhaust pipes and silencers produces unacceptable noise levels in accommodation spaces or on the navigating bridge, resilient mountings should be fitted.

10.3 When sound insulating enclosures are fitted it is desirable that the machine should be resiliently mounted and that all pipe, trunk and cable connexions to it be flexible.